


LS

DOT.MC28.....

DOT MINI CYLINDER 28

Luminaires Type, Suspended

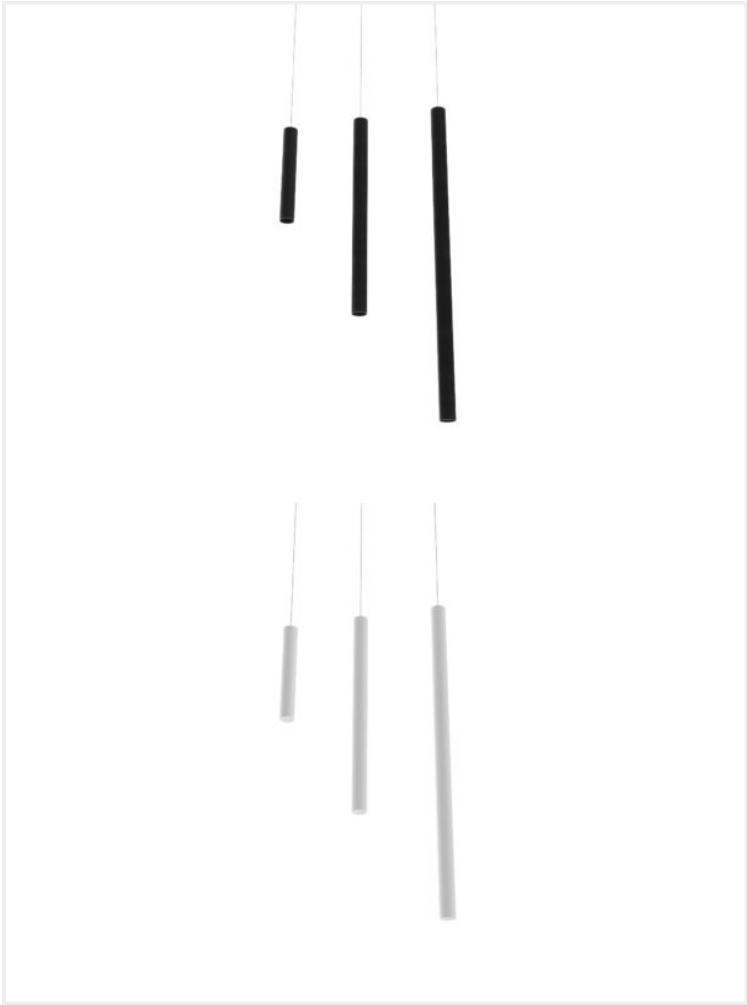

Mounting	Suspended
Wattage	3W
Voltage	240V
Dimensions	(D) Ø28mm
Drop Length	2000mm
Finish	Black, White
CCT	2700K, 3000K, 4000K
Beam Angle	20°
Material	Aluminium
Driver	In-built
IP Rating	IP20
CRI	>92+
Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Warranty	5 years
Control Gear	TRIAC
Luminaires Type	Suspended

Control Gear

Accessories

DOT.MC28						
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Drop Length	Finish	CCT	Beam Angle	Material	Driver	IP Rating	CRI	Colour Deviation	Lifetime	Warranty
	DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	Black	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	Black	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Drop Length	Finish	CCT	Beam Angle	Material	Driver	IP Rating	CRI	Colour Deviation	Lifetime	Warranty
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	White	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
	DOT.MC28 Suspended 3W		3W	240V	(D) Ø28mm	2000mm	Black	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years



Image



SKU	Mounting	Wattage	Voltage	Dimensions	Drop Length	Finish	CCT	Beam Angle	Material	Driver	IP Rating	CRI	Colour Deviation	Lifetime	Warranty
DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	Black	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years



DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	White	2700K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
----------	-----------	----	------	-----------	--------	-------	-------	-----	-----------	----------	------	------	---------	--------------	---------



DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	White	3000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
----------	-----------	----	------	-----------	--------	-------	-------	-----	-----------	----------	------	------	---------	--------------	---------



DOT.MC28	Suspended	3W	240V	(D) Ø28mm	2000mm	White	4000K	20°	Aluminium	In-built	IP20	>92+	<2 SDCM	50,000 hours	5 years
----------	-----------	----	------	-----------	--------	-------	-------	-----	-----------	----------	------	------	---------	--------------	---------