




DOT PLASTER RECESSED 280

Luminaires Type, Recessed

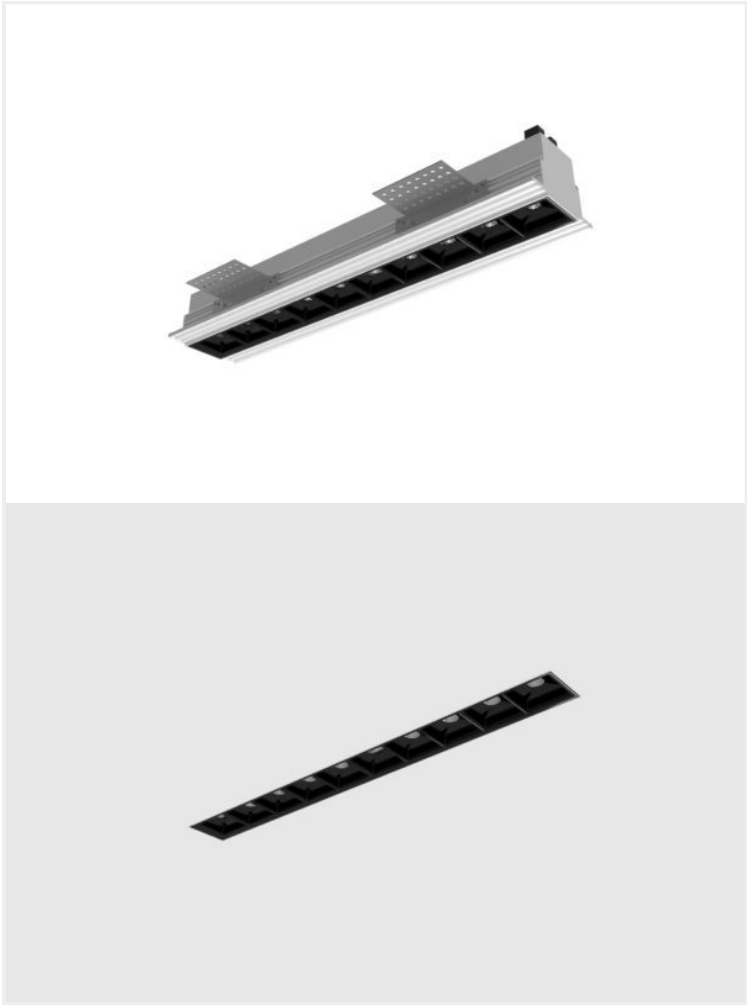

Mounting	Plaster Recessed
Wattage	20W
Dimensions	(W) 45mm x (H) 49mm x (L) 280mm
Cut Out Dimensions	(W) 37mm x (L) 273mm
Finish	Black, White
Inner Trim Finish	Black
CCT	2700K, 3000K, 3500K, 4000K
Beam Angle	10°, 15°, 30°, 45°
Material	Aluminium
Driver	Remote
IP Rating	IP23
UGR	<19
Luminous Flux	1350lm
CRI	>92+
Colour Deviation	<2 SDCM
Accessories	Clear Filter, Frosted Filter, Vertical Filter, Woven Filter
Lifetime	50,000 hours
Control Gear	DALI, TRIAC
Warranty	5 years
Luminaires Type	Recessed
Luminous Flux lm	1001-1500lm

Control Gear

Accessories
Clear Filter, Frosted Filter, Vertical Filter, Woven Filter

DOT.PR280							
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR	

VARIATIONS

Image	SKU	Mounting	Wattage	Dimensions	Cut Out Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	DOT.PR280	Plaster Recessed	20W	(W) 45mm x (H) 49mm x (L) 280mm	(W) 37mm x (L) 273mm	Black	Black	2700K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm x (H) 49mm x (L) 280mm	(W) 37mm x (L) 273mm	Black	Black	2700K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm x (H) 49mm x (L) 280mm	(W) 37mm x (L) 273mm	Black	Black	2700K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed





Image	SKU	Mounting	Wattage	Dimensions	Cut Out Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	2700K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3000K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3000K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3000K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3000K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3500K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3500K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3500K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	3500K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	4000K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	4000K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	4000K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	Black	Black	4000K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	2700K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2 SDCM	50,000 hours	5 years	Recessed	



Image	SKU	Mounting	Wattage	Dimensions	Cut Out Dimensions	Finish	Trim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	2700K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	2700K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	2700K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3000K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3000K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3000K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3000K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3500K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3500K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3500K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	3500K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	4000K	10°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	4000K	15°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed
	DOT.PR280	Plaster Recessed	20W	(W) 45mm (H) 49mm x (L) 280mm	(W) 37mm (H) 41mm x (L) 273mm	White	Black	4000K	30°	Aluminium	Remote	IP23	<19	1350lm	>92+ <2	SDCM	50,000 hours	5 years	Recessed



Image

SKU	Mounting	Wattage	Dimensions	Cut Out Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
DOT.PR280	Plaster Recessed	20W	(W) 45mm x (H) 49mm x (L) 280mm	(W) 37mm x (L) 275mm	White	Black	4000K	45°	Aluminium	Remote	IP23	<19	1350lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed