


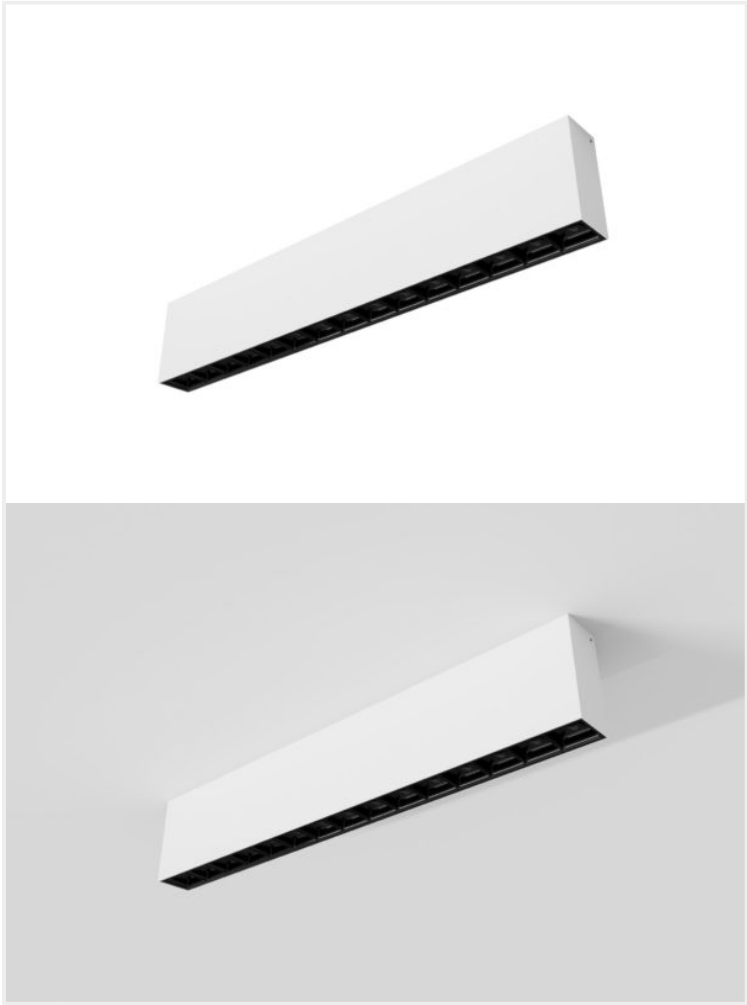

Mounting	Surface
Wattage	30W
Voltage	240V
Dimensions	(W) 34.5mm x (H) 72mm x (L) 406.5mm
Finish	Black, White
Inner Trim Finish	Black, White
CCT	2700K, 3000K, 3500K, 4000K
Beam Angle	10°, 15°, 30°, 45°
Driver	In-built
Material	Aluminium
IP Rating	IP20
Luminous Flux	2000lm
CRI	>92+
Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Accessories	Clear Filter, Frosted Filter, Vertical Filter, Woven Filter
Control Gear	TRIAC
Warranty	5 years
Luminares Type	Surface
Luminous Flux lm	1501-2000lm

Control Gear

Accessories

Clear Filter, Frosted Filter, Vertical Filter, Woven Filter

DOT.S407							
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR	

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 34.5mm x (H) 72mm x (L) 406.5mm	Black	Black	2700K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 34.5mm x (H) 72mm x (L) 406.5mm	Black	Black	2700K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	2700K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	2700K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3500K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3500K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3500K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	3500K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	4000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	Black	Black	4000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	Black	4000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	Black	4000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	2700K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	2700K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	2700K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	2700K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3500K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm x (L) 406.5mm	Black	White	3500K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	3500K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	3500K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	4000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	4000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	4000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	Black	White	4000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	2700K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	2700K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	2700K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	2700K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	3000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 14.5mm x (H) 7.2mm (L) 406.5mm	White	Black	3000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3500K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3500K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3500K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	3500K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	4000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	4000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	4000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	Black	4000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	White	2700K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm x (L) 406.5mm	White	White	2700K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	2700K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	2700K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3500K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3500K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3500K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	3500K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	4000K	10°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
	DOT.S407	Surface	30W	240V	(W) 54.5mm x (H) 7.2mm (L) 406.5mm	White	White	4000K	15°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



Image



SKU	Mounting	Wattage	Voltage	Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Driver	Material	IP Rating	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
DOT.S407	Surface	30W	240V	0W) 44.5mm x (H) 7.2mm x (L) 406.5mm	White	White	4000K	30°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years



DOT.S407	Surface	30W	240V	0W) 44.5mm x (H) 7.2mm x (L) 406.5mm	White	White	4000K	45°	In-built	Aluminium	IP20	2000lm	>92+	<2 SDCM	50,000 hours	5 years
----------	---------	-----	------	---	-------	-------	-------	-----	----------	-----------	------	--------	------	---------	-----------------	---------