




Mounting	Surface, Suspended
Wattage	15W, 22W, 30W, 38W, 45W, 52W, 60W
Voltage	240V
Dimensions	(W) 65mm x (H) 88mm
Length	1136mm, 1416mm, 1696mm, 1976mm, 2256mm, 576mm, 856mm
Finish	Black, White
CCT	3000K, 4000K
Beam Angle	60°
Material	Aluminium
Driver	In-built
Diffuser	Lense
IP Rating	IP40
UGR	<19
Luminous Flux	110lm/W
CRI	>83+, >92+
Colour Deviation	<3 SDCM
Lifetime	50,000 hours
Accessories	90 Degree Connector, Canopy Kit, Straight Connector, Surface Mounting Clip, Suspension Kit
Control Gear	1-10V, DALI, Non-dimmable
Warranty	5 years
Luminaires Type	Linear Systems – Luminaires
Luminous Flux lm	1-500lm

Control Gear

Accessories

90 Degree Connector, Canopy Kit, Straight Connector, Surface Mounting Clip, Suspension Kit

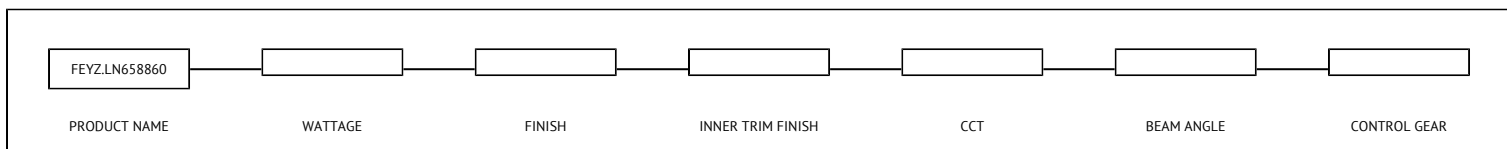

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm x (H) 88mm	2256mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm x (H) 88mm	2256mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm x (H) 88mm	2256mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm (H) 88mm	2256mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	Any Driver
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	22W	240V	(W) 65mm (H) 88mm	856mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	30W	240V	(W) 65mm (H) 88mm	1136mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	45W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	15W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	52W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built






Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Surface	60W	240V	(W) 65mm (H) 88mm	2256mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 15W	15W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 22W	22W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended 22W	22W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	22W	240V	(W) 65mm x (H) 88mm	856mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	30W	240V	(W) 65mm x (H) 88mm	1136mm	White	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm x (H) 88mm	1416mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>92+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built
	FEYZ.LN658860	Suspended	38W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	60°	Aluminium	Lense	IP40	<19	110lm/W	>83+	≤3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	In-built