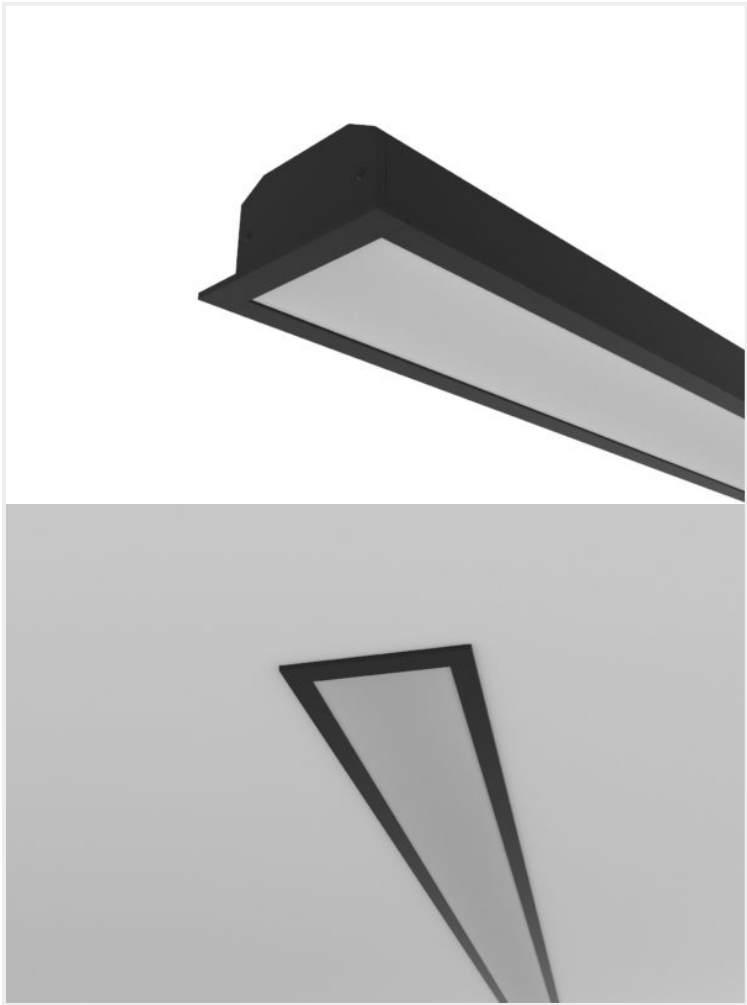







|                  |                                                      |
|------------------|------------------------------------------------------|
| Mounting         | Recessed                                             |
| Wattage          | 15W, 22W, 30W, 38W, 45W, 52W, 60W                    |
| Voltage          | 240V                                                 |
| Dimensions       | (W) 62mm x (H) 82mm                                  |
| Length           | 1136mm, 1416mm, 1696mm, 1976mm, 2256mm, 576mm, 856mm |
| Finish           | Black, White                                         |
| CCT              | 3000K, 4000K                                         |
| Beam Angle       | 96°                                                  |
| Material         | Aluminium                                            |
| Driver           | In-built                                             |
| Diffuser         | Opal Diffuser                                        |
| IP Rating        | IP40                                                 |
| UGR              | <22                                                  |
| Luminous Flux    | 102lm/W                                              |
| CRI              | >83+, >92+                                           |
| Colour Deviation | <3 SDCM                                              |
| Lifetime         | 50,000 hours                                         |
| Accessories      | 90 Degree Connector, Straight Connector              |
| Control Gear     | 1-10V, DALI, Non-dimmable                            |
| Warranty         | 5 years                                              |
| Luminaires Type  | Linear Systems – Luminaires                          |
| Luminous Flux lm | 1-500lm                                              |

Control Gear

Accessories  
90 Degree Connector, Straight Connector

|              |         |        |                   |     |            |              |
|--------------|---------|--------|-------------------|-----|------------|--------------|
| FEYZ.RLD7940 |         |        |                   |     |            |              |
| PRODUCT NAME | WATTAGE | FINISH | INNER TRIM FINISH | CCT | BEAM ANGLE | CONTROL GEAR |

VARIATIONS

| Image                                                                               | SKU          | Mounting | Wattage | Voltage | Dimensions          | Length | Finish | CCT   | Beam Angle | Material  | Driver   | Diffuser      | IP Rating | UGR | Luminous Flux | CRI  | Colour Deviation | Lifetime     | Warranty | Luminaires Type             |
|-------------------------------------------------------------------------------------|--------------|----------|---------|---------|---------------------|--------|--------|-------|------------|-----------|----------|---------------|-----------|-----|---------------|------|------------------|--------------|----------|-----------------------------|
|  | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm x (H) 82mm | 576mm  | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems – Luminaires |
|  | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm x (H) 82mm | 576mm  | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems – Luminaires |
|  | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm x (H) 82mm | 576mm  | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems – Luminaires |



| Image | SKU          | Mounting | Wattage | Voltage | Dimensions           | Length | Finish | CCT   | Beam Angle | Material  | Driver   | Diffuser      | IP Rating | UGR | Luminous Flux | CRI  | Colour Deviation | Lifetime     | Warranty | Luminaires Type             |
|-------|--------------|----------|---------|---------|----------------------|--------|--------|-------|------------|-----------|----------|---------------|-----------|-----|---------------|------|------------------|--------------|----------|-----------------------------|
|       | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm<br>(H) 82mm | 576mm  | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm<br>(H) 82mm | 576mm  | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm<br>(H) 82mm | 576mm  | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm<br>(H) 82mm | 576mm  | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 15W     | 240V    | (W) 62mm<br>(H) 82mm | 576mm  | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 22W     | 240V    | (W) 62mm<br>(H) 82mm | 856mm  | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |



| Image | SKU          | Mounting | Wattage | Voltage | Dimensions           | Length | Finish | CT    | Beam Angle | Material  | Driver   | Diffuser      | IP Rating | UGR | Luminous Flux | CRI  | Colour Deviation | Lifetime     | Warranty | Luminaires Type             |
|-------|--------------|----------|---------|---------|----------------------|--------|--------|-------|------------|-----------|----------|---------------|-----------|-----|---------------|------|------------------|--------------|----------|-----------------------------|
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 30W     | 240V    | (W) 62mm<br>(H) 82mm | 1136mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 38W     | 240V    | (W) 62mm<br>(H) 82mm | 1416mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |



| Image | SKU          | Mounting | Wattage | Voltage | Dimensions           | Length | Finish | CCT   | Beam Angle | Material  | Driver   | Diffuser      | IP Rating | UGR | Luminous Flux | CRI  | Colour Deviation | Lifetime     | Warranty | Luminaires Type             |
|-------|--------------|----------|---------|---------|----------------------|--------|--------|-------|------------|-----------|----------|---------------|-----------|-----|---------------|------|------------------|--------------|----------|-----------------------------|
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 45W     | 240V    | (W) 62mm<br>(H) 82mm | 1696mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 52W     | 240V    | (W) 62mm<br>(H) 82mm | 1976mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |



| Image | SKU          | Mounting | Wattage | Voltage | Dimensions           | Length | Finish | CCT   | Beam Angle | Material  | Driver   | Diffuser      | IP Rating | UGR | Luminous Flux | CRI  | Colour Deviation | Lifetime     | Warranty | Luminaires Type             |
|-------|--------------|----------|---------|---------|----------------------|--------|--------|-------|------------|-----------|----------|---------------|-----------|-----|---------------|------|------------------|--------------|----------|-----------------------------|
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | Black  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | Black  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | White  | 3000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >83+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |
|       | FEYZ.RLD7940 | Recessed | 60W     | 240V    | (W) 62mm<br>(H) 82mm | 2256mm | White  | 4000K | 96°        | Aluminium | In-built | Opal Diffuser | IP40      | <22 | 102lm/W       | >92+ | <3 SDCM          | 50,000 hours | 5 years  | Linear Systems - Luminaires |