




FEYZ LINEAR DIFFUSED DIRECT / INDIRECT 6588

FEYZ.LDUD6588.....

Collections, Feyz, Linear Systems, Luminaires Type

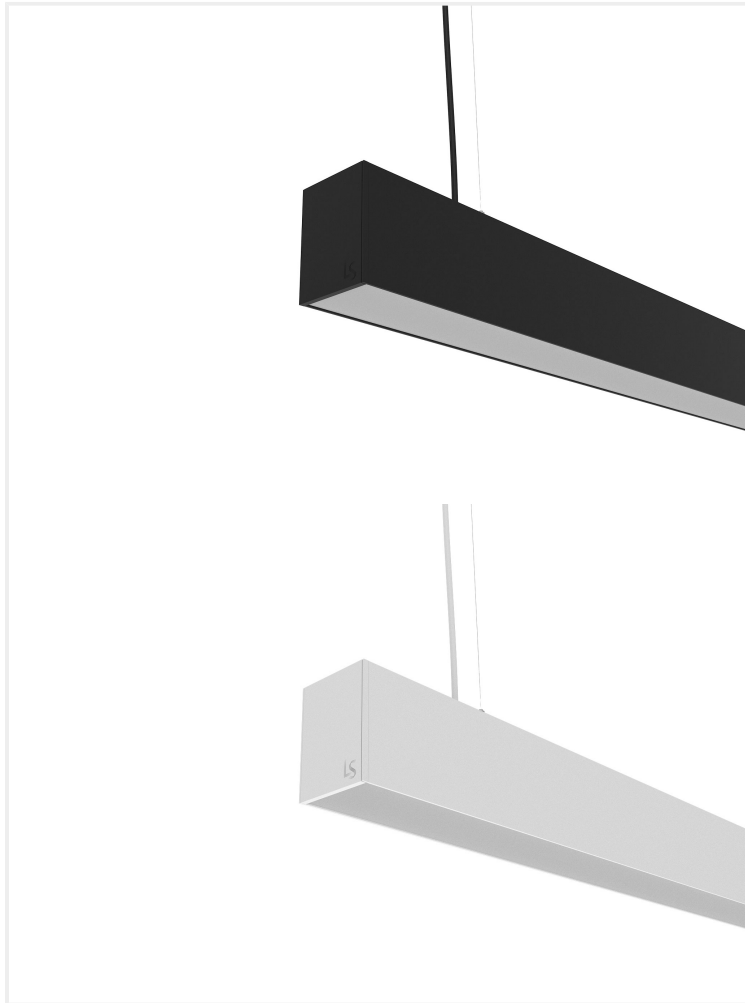

Mounting	Suspended
Wattage	22W, 32W, 45W, 57W, 67W, 78W, 90W
Voltage	240V
Dimensions	(W) 65mm x (H) 88mm
Length	1136mm, 1416mm, 1696mm, 1976mm, 2256mm, 576mm, 856mm
Finish	Black, White
CCT	3000K, 4000K
Beam Angle	101.5°
Material	Aluminium
Driver	In-built
Diffuser	Opal Diffuser
IP Rating	IP40
UGR	<19
Luminous Flux	Up 110lm/W, Down 95lm/W
CRI	>83+, >92+
Colour Deviation	<3 SDCM
Lifetime	50,000 hours
Accessories	90 Degree Connector, Canopy Kit, Straight Connector, Suspension Kit
Control Gear	1-10V, DALI, Non-dimmable
Warranty	5 years
Luminaires Type	Linear Systems – Luminaires
Luminous Flux lm	1-500lm

Control Gear

Accessories

90 Degree Connector, Canopy Kit, Straight Connector, Suspension Kit

FEYZ.LDUD6588							
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR	

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm x (H) 88mm	856mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+ <3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm x (H) 88mm	856mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+ <3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm x (H) 88mm	856mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+ <3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires	



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm (H) 88mm	856mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm (H) 88mm	856mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm (H) 88mm	856mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	32W	240V	(W) 65mm (H) 88mm	856mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	22W	240V	(W) 65mm (H) 88mm	576mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	57W	240V	(W) 65mm (H) 88mm	1416mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	45W	240V	(W) 65mm (H) 88mm	1136mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Any Mounting	67W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Any Mounting	67W	240V	(W) 65mm (H) 88mm	1696mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	67W	240V	(W) 65mm (H) 88mm	1696mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Any Mounting	78W	240V	(W) 65mm (H) 88mm	1976mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	78W	240V	(W) 65mm (H) 88mm	1976mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Length	Finish	CCT	Beam Angle	Material	Driver	Diffuser	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	White	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	White	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	Black	4000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>92+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires
	FEYZ.LDUD6588	Suspended	90W	240V	(W) 65mm (H) 88mm	2256mm	Black	3000K	101.5°	Aluminium	In-built	Opal Diffuser	IP40	<19	Up 110lm/W, Down 95lm/W	>83+	<3 SDCM	50,000 hours	5 years	Linear Systems - Luminaires