


HIRO ADJUSTABLE SPOTLIGHT R77

Collections, Hiro, Luminaires Type, Recessed

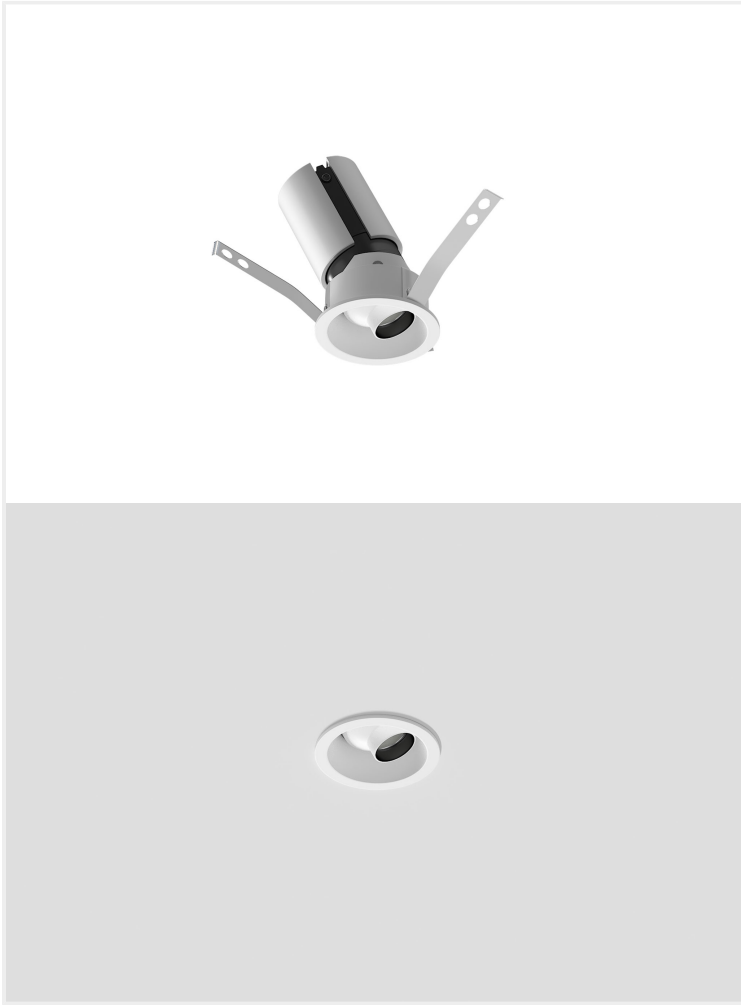

Mounting	<u>Recessed</u>
Wattage	<u>20W</u>
Voltage	<u>240V</u>
Dimensions	<u>(D) Ø77mm x (H) 135mm</u>
Cut Out Dimensions	<u>(D) Ø70mm</u>
Finish	<u>Black, White</u>
CCT	<u>2700K, 3000K, 3500K, 4000K</u>
Beam Angle	<u>15°, 24°, 36°, 45°, 55°</u>
Material	<u>Aluminium</u>
Driver	<u>Remote</u>
IP Rating	<u>IP20</u>
UGR	<u><19</u>
Luminous Flux	<u>1848lm</u>
CRI	<u>>92+</u>
Colour Deviation	<u><2 SDCM</u>
Lifetime	<u>50,000 hours</u>
Accessories	<u>Honeycomb Lens, Soft Lens, Diffuser Lens</u>
Control Gear	<u>DALI, Phase-Cut</u>
Warranty	<u>5 years</u>
Luminaires Type	<u>Recessed</u>
Luminous Flux lm	<u>2001-2500lm</u>

Control Gear

Accessories
Honeycomb Lens, Soft Lens, Diffuser Lens

HIRO.ASR077						
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	Black	2700K	15°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	Black	2700K	24°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	Black	2700K	36°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years



Image

SKU Mounting Wattage Voltage Dimensions Cut Out Dimensions Finish CCT Beam Angle Material Driver IP Rating UGR Luminous Flux CRI Colour Deviation Lifetime Warranty



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 2700K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 2700K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3000K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3000K 24° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3000K 36° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3000K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3000K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3500K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3500K 24° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3500K 36° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3500K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 3500K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 4000K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



~~HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 4000K 24° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years~~





Image

SKU Mounting Wattage Voltage Dimensions Cut Out Dimensions Finish CCT Beam Angle Material Driver IP Rating UGR Luminous Flux CRI Colour Deviation Lifetime Warranty



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 4000K 36° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 4000K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm Black 4000K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 2700K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 2700K 24° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 2700K 36° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 2700K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 2700K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3000K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3000K 24° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3000K 36° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3000K 45° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3000K 55° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years



~~HIRO.ASR077 Recessed 20W 240V (D) Ø77mm (H) 135mm (D) Ø70mm White 3500K 15° Aluminium Remote IP20 <19 1848lm >92+ <2 SDCM 50,000 hours 5 years~~





Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	3500K	24°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	3500K	36°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	3500K	45°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	3500K	55°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	4000K	15°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	4000K	24°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	4000K	36°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	4000K	45°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years
	HIRO.ASR077	Recessed	20W	240V	(D) Ø77mm (H) 135mm	(D) Ø70mm	White	4000K	55°	Aluminium	Remote	IP20	<19	1848lm	>92+	<2 SDCM	50,000 hours	5 years