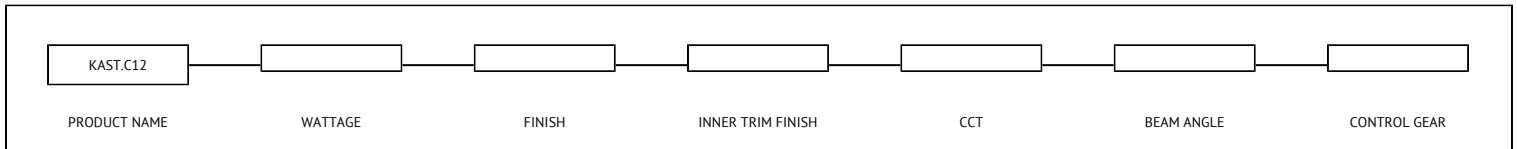





Mounting	<u>Recessed</u>
Wattage	<u>12W</u>
Voltage	<u>240V</u>
Dimensions	<u>(D) Ø105mm x (H) 115.5mm</u>
Cut Out Dimensions	<u>(D) Ø95mm</u>
Finish	<u>White</u>
CCT	<u>3000K, 4000K, 5000K</u>
Beam Angle	<u>60°</u>
Material	<u>Aluminium</u>
Driver	<u>Remote</u>
IP Rating	<u>IP23</u>
UGR	<u><19</u>
Luminous Flux	<u>960lm</u>
CRI	<u>>92+</u>
Colour Deviation	<u><2 SDCM</u>
Lifetime	<u>50,000 hours</u>
Control Gear	<u>Phase-Cut</u>
Warranty	<u>5 years</u>
Luminous Flux lm	<u>501-1000lm</u>

Control Gear

Accessories



VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty
	KAST.C12	Recessed	12W	240V	(D) Ø105mm x (H) 115.5mm	(D) Ø95mm	White	3000K	60°	Aluminium	IP23	<19	960lm	>92+	<2 SDCM	50,000 hours	5 years	Remote
	KAST.C12	Recessed	12W	240V	(D) Ø105mm x (H) 115.5mm	(D) Ø95mm	White	4000K	60°	Aluminium	IP23	<19	960lm	>92+	<2 SDCM	50,000 hours	5 years	Remote
	KAST.C12	Recessed	12W	240V	(D) Ø105mm x (H) 115.5mm	(D) Ø95mm	White	5000K	60°	Aluminium	IP23	<19	960lm	>92+	<2 SDCM	50,000 hours	5 years	Remote