




|                         |                                      |
|-------------------------|--------------------------------------|
| <b>Wattage</b>          | 4.8W/m                               |
| <b>Voltage</b>          | DC24V                                |
| <b>Dimensions</b>       | (W) 10mm                             |
| <b>Cut Length</b>       | 50mm                                 |
| <b>CCT</b>              | 2700K, 3000K, 3500K, 4000K, 5000K    |
| <b>Beam Angle</b>       | 120°                                 |
| <b>Driver</b>           | Remote                               |
| <b>IP Rating</b>        | IP20, IP67, IP68                     |
| <b>Luminous Flux</b>    | 504lm/m                              |
| <b>CRI</b>              | >92+, >98                            |
| <b>Colour Deviation</b> | <3 SDCM                              |
| <b>Control Gear</b>     | 1-10V, DALI, Non-dimmable, Phase-Cut |
| <b>Warranty</b>         | 5 years                              |
| <b>Luminaires Type</b>  | Linear Systems – Linear Light Source |
| <b>Luminous Flux lm</b> | 501-1000lm                           |

Control Gear

Accessories

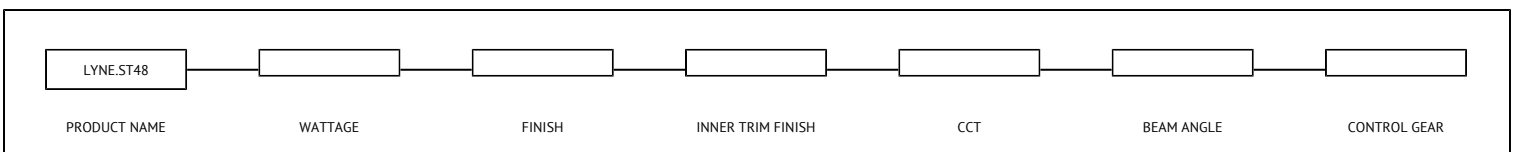

## VARIATIONS

| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 2700K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI | Colour Deviation | Control Gear | Warranty                             | Luminaires Type |              |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|-----|------------------|--------------|--------------------------------------|-----------------|--------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 3500K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP20   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |





| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI     | Colour Deviation | Control Gear                         | Warranty | Luminaires Type |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|---------|------------------|--------------------------------------|----------|-----------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP67   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Non-dimmable    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 4000K | 120°       | IP68   | 504lm/m   | >98           | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | Phase-Cut       |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | 1-10V           |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >92+          | ≤3 SDCM | 5 years          | Linear Systems - Linear Light Source | Remote   | DALI            |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI | Colour Deviation | Control Gear | Warranty                             | Luminaires Type |              |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|-----|------------------|--------------|--------------------------------------|-----------------|--------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP20   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >92+          | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >98           | ≥3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote          | DALI         |



| Image | SKU       | Wattage | Voltage | Dimensions | Cut Length | CCT   | Beam Angle | Driver | IP Rating | Luminous Flux | CRI | Colour Deviation | Control Gear | Warranty                             | Luminaires Type     |
|-------|-----------|---------|---------|------------|------------|-------|------------|--------|-----------|---------------|-----|------------------|--------------|--------------------------------------|---------------------|
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP67   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >92+          | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Phase-Cut    |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote 1-10V        |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote DALI         |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Non-dimmable |
|       | LYNE.ST48 | 4.8W/m  | DC24V   | (W) 10mm   | 50mm       | 5000K | 120°       | IP68   | 504lm/m   | >98           | ≤3  | SDCM             | 5 years      | Linear Systems - Linear Light Source | Remote Phase-Cut    |