


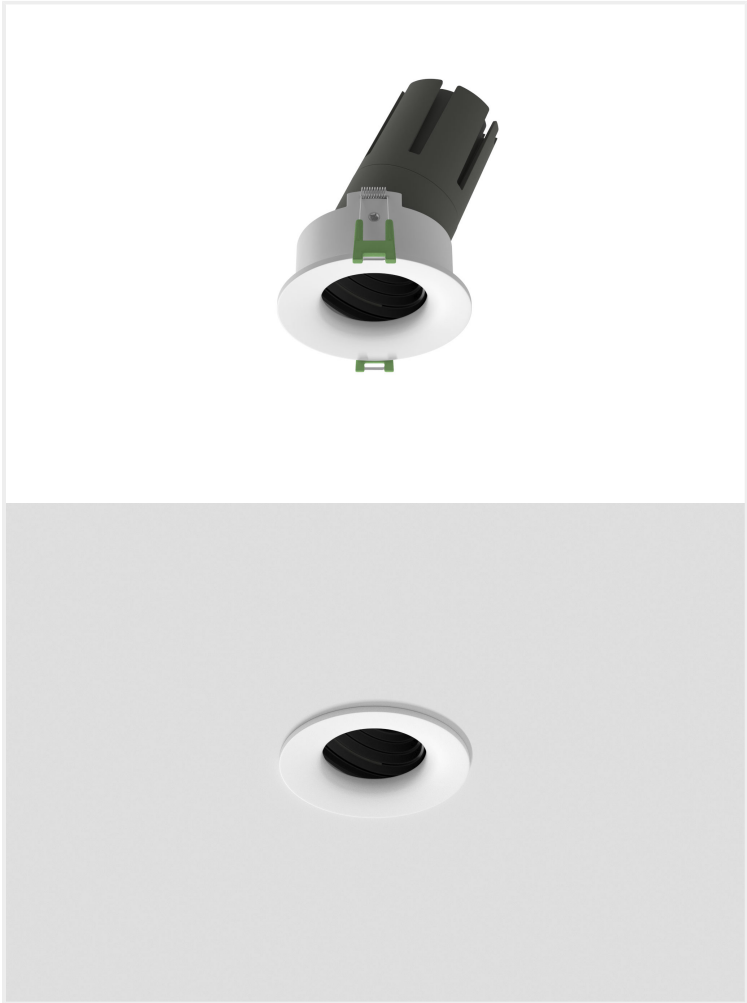

Mounting	Recessed
Wattage	15W, 9W
Voltage	240V
Dimensions	(D) Ø88mm x (H) 101mm, (D) Ø88mm x (H) 124mm
Cut Out Dimensions	(D) Ø75mm
Finish	Black, White
CCT	2700K, 3000K, 3500K, 4000K
Beam Angle	15°, 24°, 38°, 55°
Material	Aluminium
Driver	Remote
IP Rating	IP20
UGR	<19
Luminous Flux	1275lm, 765lm
CRI	>92+
Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Accessories	Honeycomb Lense, Soft Lense
Control Gear	DALI, Phase-Cut
Warranty	5 years
Luminaires Type	Recessed
Luminous Flux lm	1001-1500lm, 501-1000lm

Control Gear

Accessories
Honeycomb Lense, Soft Lense

MODO.ADR088						
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MODO.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3000K	55°	Aluminium	IP20	<19	1275lm	>92+	≤2 SDCM	50,000 hours	5 years	Recessed	Remote
	MODO.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3000K	38°	Aluminium	IP20	<19	1275lm	>92+	≤2 SDCM	50,000 hours	5 years	Recessed	Remote
	MODO.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3000K	24°	Aluminium	IP20	<19	1275lm	>92+	≤2 SDCM	50,000 hours	5 years	Recessed	Remote



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3000K 15°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	2700K 55°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	2700K 38°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	2700K 24°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	2700K 15°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	Any Voltage	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	4000K 55°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	4000K 38°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	4000K 24°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	4000K 15°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3500K 55°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3500K 38°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3500K 24°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	Black	3500K 15°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3000K 55°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3000K 38°		Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3000K	24°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3000K	15°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	2700K	55°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	2700K	38°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	2700K	24°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	2700K	15°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	4000K	55°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	4000K	38°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	4000K	24°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	4000K	15°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3500K	55°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3500K	38°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3500K	24°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	15W	240V	(D) Ø88mm (H) 124mm	(D) Ø75mm	White	3500K	15°	Aluminium	IP20	<19	1275lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MOD0.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	Black	2700K	15°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	



Image

SKU

Mounting

Wattage

Voltage

Dimensions

Cut Out
Dimensions

Finish

CCT

Beam
Angle

Material

Driver

IP
Rating

UGR

Luminous
Flux

CRI

Colour
Deviation

Lifetime

Warranty

Luminaires
Type



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 2700K 24° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 2700K 38° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 2700K 55° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3000K 15° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3000K 24° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3000K 38° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3000K 55° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3500K 15° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3500K 24° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 3500K 38° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 4000K 15° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 4000K 24° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 4000K 38° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote



MOD0.ADR088 Recessed 9W 240V (D) Ø88mm (H) 101mm (D) Ø75mm Black 4000K 55° Aluminium IP20 <19 765lm >92+ ≤2 SDCM 50,000 hours 5 years Recessed Remote





Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	2700K	15°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	2700K	24°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	2700K	38°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	2700K	55°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3000K	15°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3000K	24°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3000K	38°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3000K	55°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3500K	15°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3500K	24°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3500K	38°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	3500K	55°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	4000K	15°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	4000K	24°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	
	MODO.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	4000K	38°	Aluminium	IP20	<19	765lm	>92+	≥2 SDCM	50,000 hours	5 years	Recessed Remote	



Image



SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
MOD0.ADR088	Recessed	9W	240V	(D) Ø88mm (H) 101mm	(D) Ø75mm	White	4000K	55°	Aluminium	IP20	<19	765lm	>92+	≥2SDCM	50,000 Hours	5 years	Recessed Remote	