


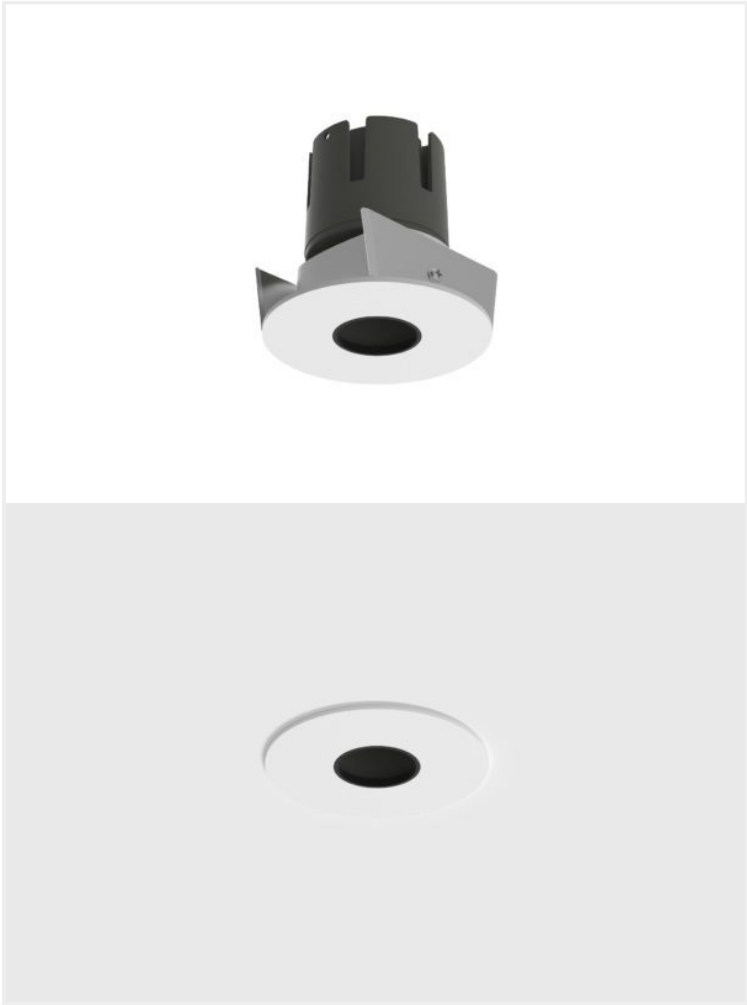

Mounting	Recessed
Wattage	15W, 9W
Voltage	240V
Dimensions	(D) Ø85mm x (H) 105.5mm, (D) Ø85mm x (H) 82.5mm
Cut Out Dimensions	(D) Ø75mm
Finish	Black, White
Inner Trim Finish	Black
CCT	2700K, 3000K, 4000K
Beam Angle	15°, 24°, 38°, 55°
Material	Aluminium
Driver	Remote
IP Rating	IP20
UGR	<19
Luminous Flux	1275lm, 765lm
CRI	>92+
Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Accessories	Soft Lense
Control Gear	DALI, TRIAC
Warranty	5 years
Luminaires Type	Recessed
Luminous Flux lm	1001-1500lm, 501-1000lm

Control Gear

Accessories
Soft Lense

MODO.PS085						
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR

VARIATIONS

Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	Inner Trim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MODO.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	2700K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	2700K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	2700K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed



Image

SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	Inner rim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	2700K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	3000K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	3000K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	3000K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	3000K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	4000K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	4000K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	4000K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	Black	Black	4000K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	2700K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	2700K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	2700K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	2700K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	3000K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	3000K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed





Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	Inner rim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	3000K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	3000K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	4000K	15°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	4000K	24°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	4000K	38°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	15W	240V	(D) Ø85mm (H) 105.5mm	(D) Ø75mm	White	Black	4000K	55°	Aluminium	Remote	IP20	<19	1275lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	2700K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	2700K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	2700K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	2700K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	3000K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	3000K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	3000K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	3000K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MOD0.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	4000K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed



Image	SKU	Mounting	Wattage	Voltage	Dimensions	Cut Out Dimensions	Finish	Inner rim Finish	CCT	Beam Angle	Material	Driver	IP Rating	UGR	Luminous Flux	CRI	Colour Deviation	Lifetime	Warranty	Luminaires Type
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	4000K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	4000K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	Black	Black	4000K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	2700K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	2700K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	2700K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	2700K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	3000K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	3000K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	3000K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	3000K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	4000K	15°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	4000K	24°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	4000K	38°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed
	MODO.PS085	Recessed	9W	240V	(D) Ø85mm (H) 82.5mm	(D) Ø75mm	White	Black	4000K	55°	Aluminium	Remote	IP20	<19	765lm	>92+	<2 SDCM	50,000 hours	5 years	Recessed

