


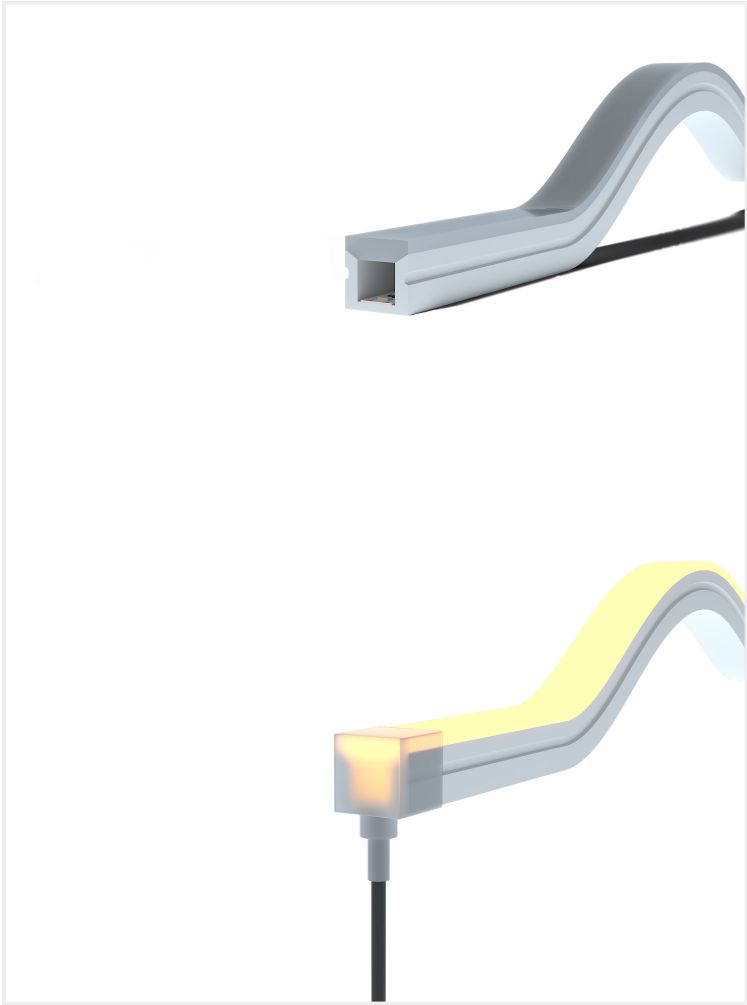

|                  |                                                                                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------|
| Wattage          | 10W/m                                                                                                           |
| Voltage          | DC24V                                                                                                           |
| Dimensions       | (W) 10mm x (H) 10mm                                                                                             |
| Cut Length       | 50mm                                                                                                            |
| CCT              | 2700K, 3000K, 3500K, 4000K, 5000K, RGB, Solid Colours                                                           |
| Beam Angle       | 270°                                                                                                            |
| Driver           | Remote                                                                                                          |
| IP Rating        | IP67                                                                                                            |
| CRI              | >92+                                                                                                            |
| Colour Deviation | <3 SDCM                                                                                                         |
| Luminous Flux    | 720lm/m                                                                                                         |
| Accessories      | Bottom Power End Cap, End Cap, Front Power End Cap, Mounting Profile, Side Power End Cap, Surface Mounting Clip |
| Control Gear     | 1-10V, DALI, DMX, Non-dimmable, RGB Controller, TRIAC                                                           |
| Warranty         | 5 years                                                                                                         |
| Luminaires Type  | Linear Systems – Linear Light Source                                                                            |
| Luminous Flux lm | 1-500lm                                                                                                         |



Control Gear

Accessories













Bottom Power End Cap, End Cap, Front Power End Cap, Mounting Profile, Side Power End Cap, Surface Mounting Clip

|              |         |        |                   |     |            |              |
|--------------|---------|--------|-------------------|-----|------------|--------------|
| NEON.M1010   |         |        |                   |     |            |              |
| PRODUCT NAME | WATTAGE | FINISH | INNER TRIM FINISH | CCT | BEAM ANGLE | CONTROL GEAR |













VARIATIONS

| Image                                                                               | SKU        | Wattage | Voltage | Dimensions          | Cut Length | CCT   | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Luminous Flux | Control Gear | Warranty | Luminaires Type                      |
|-------------------------------------------------------------------------------------|------------|---------|---------|---------------------|------------|-------|------------|--------|-----------|------|------------------|---------------|--------------|----------|--------------------------------------|
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V        | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI         | 5 years  | Linear Systems - Linear Light Source |















| Image                                                                               | SKU        | Wattage | Voltage | Dimensions             | Cut Length | CCT   | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Luminous Flux | Control Gear   | Warranty | Luminaires Type                      |
|-------------------------------------------------------------------------------------|------------|---------|---------|------------------------|------------|-------|------------|--------|-----------|------|------------------|---------------|----------------|----------|--------------------------------------|
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 2700K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|   | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |







| Image                                                                               | SKU        | Wattage | Voltage | Dimensions             | Cut Length | CCT   | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Luminous Flux | Control Gear   | Warranty | Luminaires Type                      |
|-------------------------------------------------------------------------------------|------------|---------|---------|------------------------|------------|-------|------------|--------|-----------|------|------------------|---------------|----------------|----------|--------------------------------------|
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 3500K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|   | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 4000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |



| Image                                                                               | SKU        | Wattage | Voltage | Dimensions             | Cut Length | CCT           | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Luminous Flux | Control Gear   | Warranty | Luminaires Type                      |
|-------------------------------------------------------------------------------------|------------|---------|---------|------------------------|------------|---------------|------------|--------|-----------|------|------------------|---------------|----------------|----------|--------------------------------------|
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K         | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K         | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K         | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | 5000K         | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|   | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | RGB           | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | 1-10V          | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DALI           | 5 years  | Linear Systems - Linear Light Source |



| Image                                                                             | SKU        | Wattage | Voltage | Dimensions             | Cut Length | CCT           | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Luminous Flux | Control Gear   | Warranty | Luminaires Type                      |
|-----------------------------------------------------------------------------------|------------|---------|---------|------------------------|------------|---------------|------------|--------|-----------|------|------------------|---------------|----------------|----------|--------------------------------------|
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | DMX            | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | Non-dimmable   | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | RGB Controller | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.M1010 | 10W/m   | DC24V   | (W) 10mm<br>x (H) 10mm | 50mm       | Solid Colours | 270°       | Remote | IP67      | >92+ | <3 SDCM          | 720lm/m       | TRIAC          | 5 years  | Linear Systems - Linear Light Source |