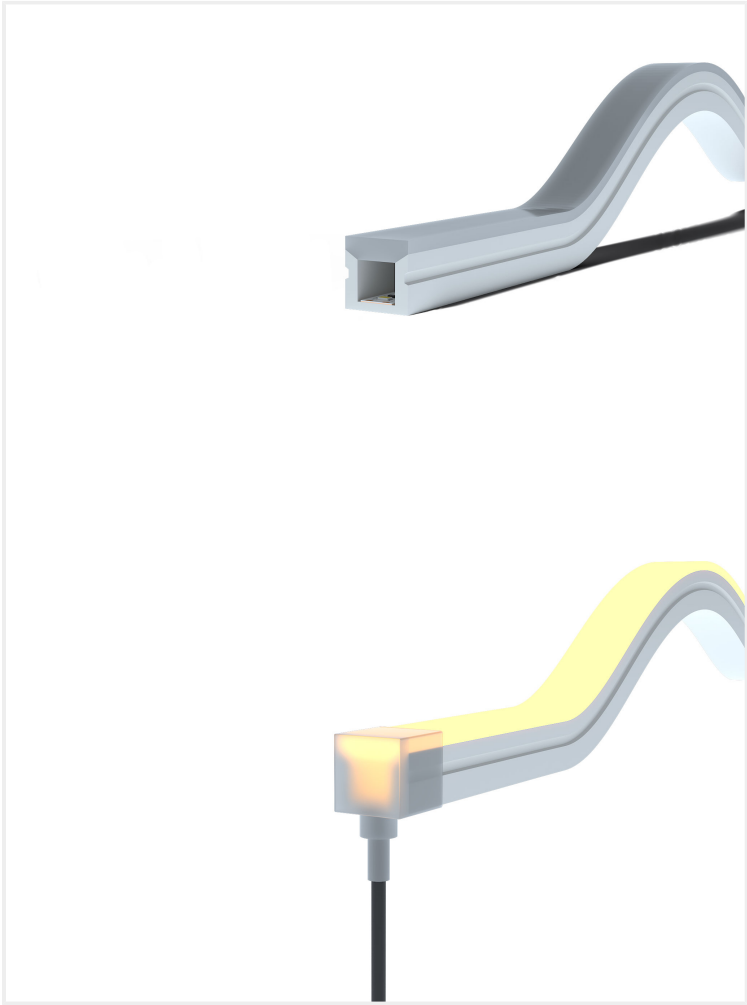




Wattage	10W/m
Voltage	DC24V
Dimensions	(W) 10mm x (H) 10mm
Cut Length	50mm
CCT	2700K, 3000K, 3500K, 4000K, 5000K, RGB, Solid Colours
Beam Angle	270°
Driver	Remote
IP Rating	IP67
CRI	>92+
Colour Deviation	<3 SDCM
Luminous Flux	720lm/m
Accessories	Bottom Power End Cap, End Cap, Front Power End Cap, Mounting Profile, Side Power End Cap, Surface Mounting Clip
Control Gear	1-10V, DALI, DMX, Non-dimmable, RGB Controller, TRIAC
Warranty	5 years
Luminaires Type	Linear Systems – Linear Light Source
Luminous Flux lm	1-500lm

Control Gear

Accessories

Bottom Power End Cap, End Cap, Front Power End Cap, Mounting Profile, Side Power End Cap, Surface Mounting Clip

NEON.M1010						
PRODUCT NAME	WATTAGE	FINISH	INNER TRIM FINISH	CCT	BEAM ANGLE	CONTROL GEAR

VARIATIONS



Image	SKU	Wattage	Voltage	Dimensions	Cut Length	CCT	Beam Angle	Driver	IP Rating	CRI	Colour Deviation	Luminous Flux	Control Gear	Warranty	Luminaires Type
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source















Image	SKU	Wattage	Voltage	Dimensions	Cut Length	CCT	Beam Angle	Driver	IP Rating	CRI	Colour Deviation	Luminous Flux	Control Gear	Warranty	Luminaires Type
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	2700K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source















Image	SKU	Wattage	Voltage	Dimensions	Cut Length	CCT	Beam Angle	Driver	IP Rating	CRI	Colour Deviation	Luminous Flux	Control Gear	Warranty	Luminaires Type
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	3500K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	4000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source



















Image	SKU	Wattage	Voltage	Dimensions	Cut Length	CCT	Beam Angle	Driver	IP Rating	CRI	Colour Deviation	Luminous Flux	Control Gear	Warranty	Luminaires Type
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	5000K	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	RGB	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	1-10V	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DALI	5 years	Linear Systems - Linear Light Source



Image	SKU	Wattage	Voltage	Dimensions	Cut Length	CCT	Beam Angle	Driver	IP Rating	CRI	Colour Deviation	Luminous Flux	Control Gear	Warranty	Luminaires Type
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	DMX	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	Non-dimmable	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	RGB Controller	5 years	Linear Systems - Linear Light Source
	NEON.M1010	10W/m	DC24V	(W) 10mm x (H) 10mm	50mm	Solid Colours	270°	Remote	IP67	>92+	<3 SDCM	720lm/m	TRIAC	5 years	Linear Systems - Linear Light Source