


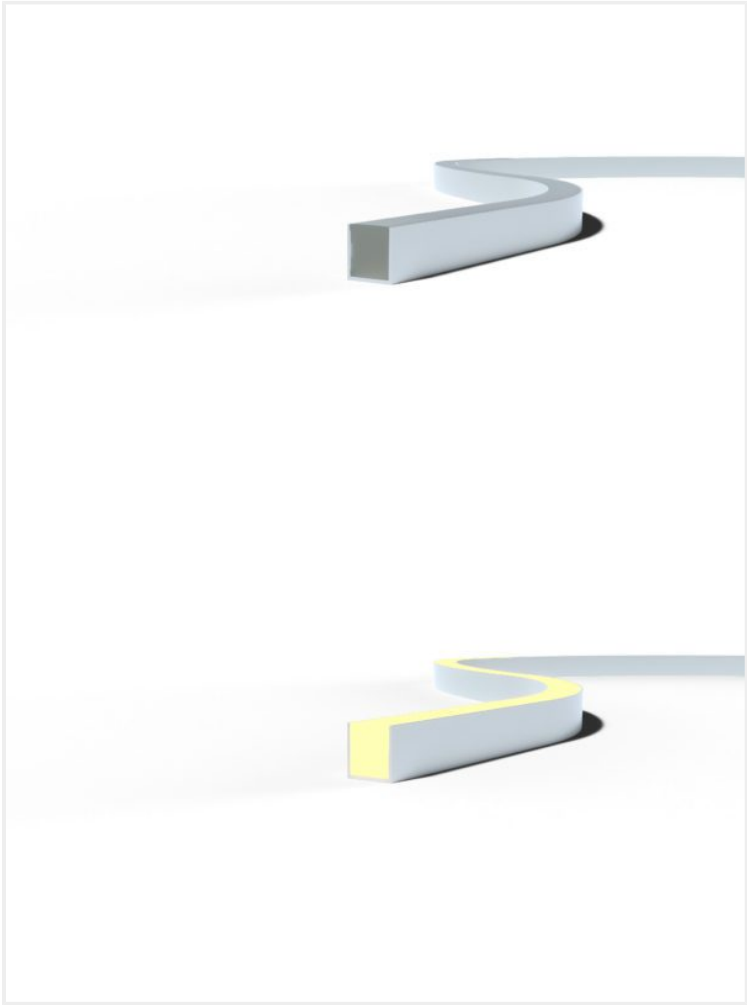

|                  |                                                                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wattage          | 15W/m                                                                                                                                                     |
| Voltage          | DC24V                                                                                                                                                     |
| Dimensions       | (W) 16mm x (H) 17mm                                                                                                                                       |
| Cut Length       | 55.5mm                                                                                                                                                    |
| CCT              | 2700K, 3000K, 3500K, 4000K, 5000K, RGB, Solid Colours                                                                                                     |
| Beam Angle       | 160°                                                                                                                                                      |
| Driver           | Remote                                                                                                                                                    |
| IP Rating        | IP67                                                                                                                                                      |
| CRI              | >92+, >98                                                                                                                                                 |
| Colour Deviation | <3 SDCM                                                                                                                                                   |
| Accessories      | Bottom Power End Cap, End Caps, Front Power End Cap, Mounting Profile, Self Locking Clip, Self Locking Profile, Side Power End Cap, Surface Mounting Clip |
| Luminous Flux    | 475lm                                                                                                                                                     |
| Warranty         | 5 years                                                                                                                                                   |
| Luminaires Type  | Linear Systems – Linear Light Source                                                                                                                      |
| Luminous Flux lm | 1-500lm                                                                                                                                                   |

Control Gear



Accessories  
Bottom Power End Cap, End Caps, Front Power End Cap, Mounting Profile, Self Locking Clip, Self Locking Profile, Side Power End Cap, Surface Mounting Clip

|              |         |        |                   |     |            |              |
|--------------|---------|--------|-------------------|-----|------------|--------------|
| NEON.PS1617  |         |        |                   |     |            |              |
| PRODUCT NAME | WATTAGE | FINISH | INNER TRIM FINISH | CCT | BEAM ANGLE | CONTROL GEAR |

# VARIATIONS

| Image | SKU         | Wattage | Voltage | Dimensions          | Cut Length | CCT   | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Accessories     | Luminous Flux | Warranty | Luminaires Type                      |
|-------|-------------|---------|---------|---------------------|------------|-------|------------|--------|-----------|------|------------------|-----------------|---------------|----------|--------------------------------------|
|       | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm x (H) 17mm | 55.5mm     | 2700K | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|       | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm x (H) 17mm | 55.5mm     | 2700K | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |



| Image                                                                               | SKU         | Wattage | Voltage | Dimensions           | Cut Length | CCT           | Beam Angle | Driver | IP Rating | CRI  | Colour Deviation | Accessories     | Luminous Flux | Warranty | Luminaires Type                      |
|-------------------------------------------------------------------------------------|-------------|---------|---------|----------------------|------------|---------------|------------|--------|-----------|------|------------------|-----------------|---------------|----------|--------------------------------------|
|    | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 3000K         | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 3000K         | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 3500K         | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 3500K         | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|    | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 4000K         | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|   | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 4000K         | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 5000K         | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | 5000K         | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | RGB           | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | RGB           | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | Solid Colours | 160°       | Remote | IP67      | >92+ | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |
|  | NEON.PS1617 | 15W/m   | DC24V   | (W) 16mm<br>(H) 17mm | 55.5mm     | Solid Colours | 160°       | Remote | IP67      | >98  | <3 SDCM          | Any Accessories | 475lm         | 5 years  | Linear Systems - Linear Light Source |

