




DOT SQUARE 407

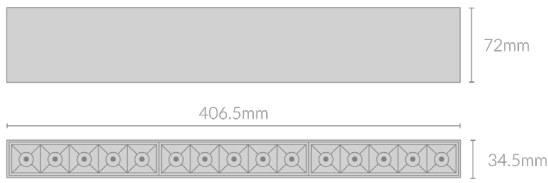

Specifications

| | | | |
|-------------------|---|---------------|--------------|
| Mounting | Surface Mounting | Lifetime | 50,000 hours |
| Wattage | 30W | Adjustability | |
| Voltage | 240V | Control Gear | TRIAC |
| Dimensions | (L) 406.5mm x (W) 34.5mm x (H) 72mm | Warranty | 3 years |
| Finish | Black/White | | |
| Inner Trim Finish | Black/White | | |
| CCT | 2700K/3000K/3500K/4000K | | |
| Beam Angle | 10°/15°/30°/45° | | |
| Material | Aluminum | | |
| Driver | Inbuilt | | |
| IP Rating | IP20 | | |
| UGR | | | |
| Luminous Flux | 2000lm | | |
| CRI | >92+ | | |
| Accessories | Frosted Filter, Clear Filter, Vertical Filter, Woven Filter | | |
| Colour Deviation | <2 SDCM | | |

Product Accessories


Frosted Filter




Clear Filter



Vertical Filter



Woven Filter



Product Code

Example - DOT.S407.30.BLK.BLK.27.15.FRFL.TRIAC

| Product Name | Wattage | Finish | Inner Trim Finish | CCT | Beam Angle | Accessories | Control Gear |
|--------------|---------|----------------------------|----------------------------|--|-------------------------|---|---------------|
| DOT.S407 | 30(W) | BLK (Black) WHT (White) | BLK (Black) WHT (White) | 27 (00K) 35 (00K) 30 (00K) 40 (00K) | 15(°) 30(°) 45(°) | FRFL (Frosted Filter) CLFL (Clear Filter) VRFL (Vertical Filter) WVFL (Woven Filter) | TRIAC (TRIAC) |