




LYNE MICRO 9.6

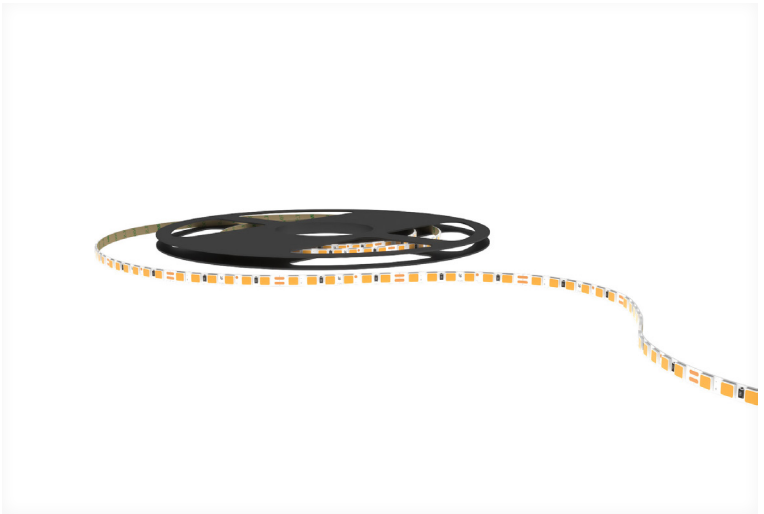

Specifications

| | |
|---------------|----------------------------------|
| Wattage | 9.6W/m |
| Voltage | DC24V |
| Dimensions | (W) 3.5mm |
| Cut Length | 37.5mm |
| CCT | 2700K/3000K/3500K/4000K/5000K |
| Beam Angle | 120° |
| IP Rating | IP20 |
| Luminous Flux | 1000lm/m |
| CRI | >92+/98 |
| Control Gear | Non Dimmable, 1-10V, TRIAC, DALI |
| Warranty | 5 years |

*MUST BE PLACED IN EXTRUSION FOR WARRANTY

Product Code

Example - LYNE.M96.9-6.27.120.20.92.NDM

| Product Name | Wattage | CCT | Beam Angle | IP Rating | CRI | Control Gear |
|--------------|----------|--|------------|-----------|---------------------|---|
| LYNE.M96 | 9.6(W/m) | 27 (00K) 30 (00K) 40 (00K) 50 (00K) | 120(°) | (IP)20 | (IP)92(+) (IP)98 | NDM (Non-dimmable) 1-10V (1-10V Dimming) TRIAC (TRIAC) DALI (DALI) |