




# LYNE STANDARD 4.8

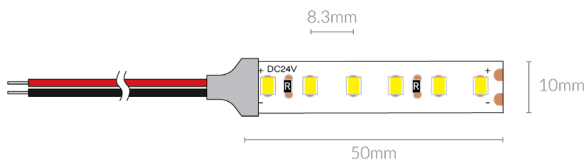

## Specifications

Wattage	4.8W/m
Voltage	DC24V
Dimensions	(W) 10mm
Cut Length	50mm
CCT	2700K/3000K/3500K/4000K/5000K
Beam Angle	120°
IP Rating	IP20/IP67/IP68
Luminous Flux	504lm/m
CRI	>92+/98
Control Gear	Non Dimmable, 1-10V, TRIAC, DALI
Warranty	5 years

\*MUST BE PLACED IN EXTRUSION FOR WARRANTY

# Product Code

Example - LYNE.S48.4-8.27.120.20.92.NDM

Product Name	Wattage	CCT	Beam Angle	IP Rating	CRI	Control Gear
LYNE.S48	4-8(W/m)	27 (00K) 30 (00K) 40 (00K) 50 (00K)	120(°)	(IP)20 (IP)67 (IP)68	(>)92(+) (>)98	NDM (Non-dimmable) 1-10V (1-10V) TRIAC (TRIAC) DALI (DALI)