
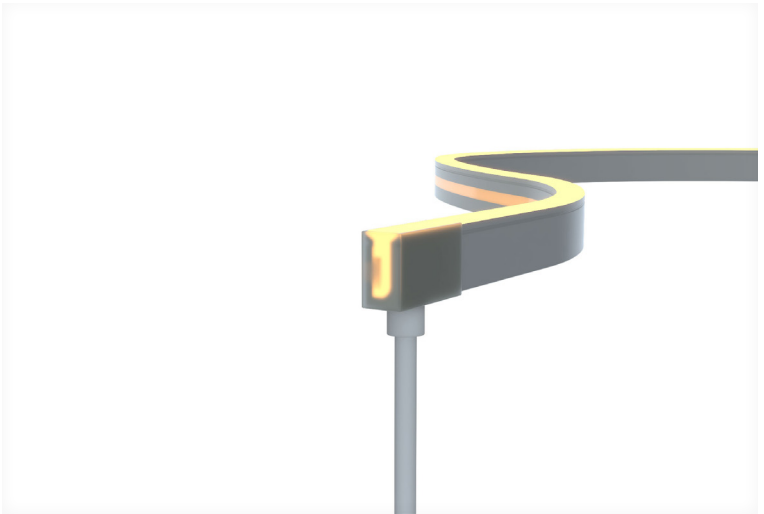










NEON MICRO 0612



Specifications

Wattage	10W/m
Voltage	DC24V
Dimensions	(W) 6mm x (H) 12mm
Cut Length	50mm
CCT	2700K/3000K/3500K/4000K/5000K/ Solid Colours/RGB
Beam Angle	160°
IP Rating	IP67
Luminous Flux	360lm/m
CRI	>92+
Accessories	Surface Mounting Clip, Mounting Profile, Front Power End Cap, Side Power End Cap, Bottom Power End Cap, End Cap
Control Gear	Non Dimmable, 1-10V, TRIAC, DALI, RGB Controller, DMX
Warranty	5 years

Product Accessories

<p>Surface Mounting Clip</p> 	<p>Mounting Profile</p> 	<p>Front Power End Cap</p> 	<p>Side Power End Cap</p> 
<p>Bottom Power End Cap</p> 	<p>End Cap</p> 		

Product Code

Example - NEON.M0612.10.27.160.67.92.NDM

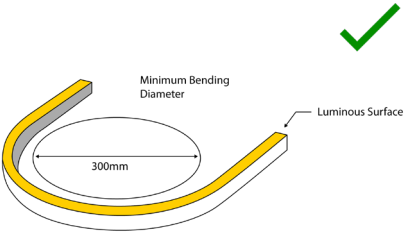
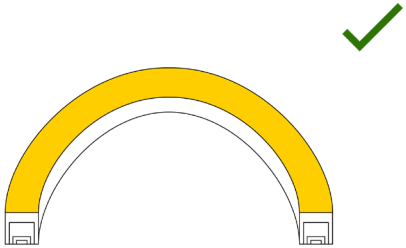
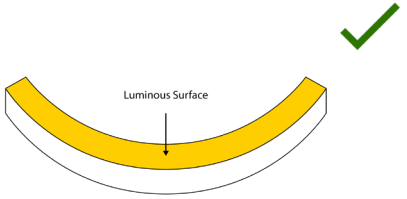
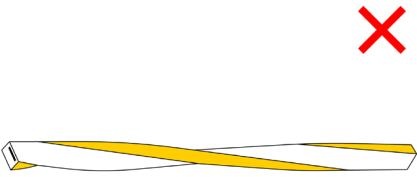
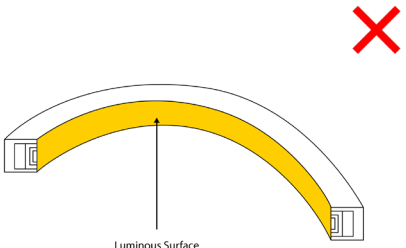
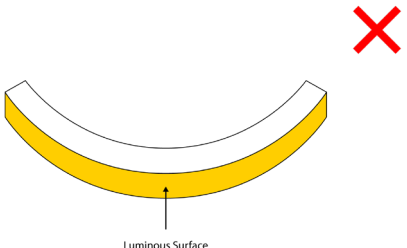
Product Name	Wattage	CCT	Beam Angle	IP Rating	CRI	Control Gear
NEON.M0612	10(W/m)	27 (00K) 30 (00K) 40 (00K) 50 (00K) SCL (Solid Colour) RGB (RGB)	160(°)	(IP)67	(>)92(+)	NDM (Non-dimmable) 1-10V (1-10V) TRIAC (TRIAC) DLIA (DALI) RGBC (RGB Controller) DMX (DMX)

Product Accessory Code

Example - NEON.M0612.SFMC

Product Name	Accessories
NEON.M0612	SFMC (Surface Mounting Clip) MTPF (Mounting Profile) FPEC (Front Power End Cap) SPEC (Side Power End Cap) BPEC (Bottom Power End Cap) ENDC (End Cap)

Bending Diagram

 <p>Minimum Bending Diameter 300mm Luminous Surface</p>	 <p>Luminous Surface</p>	 <p>Luminous Surface</p>
	 <p>Luminous Surface</p>	 <p>Luminous Surface</p>