






NEON MICRO 1010

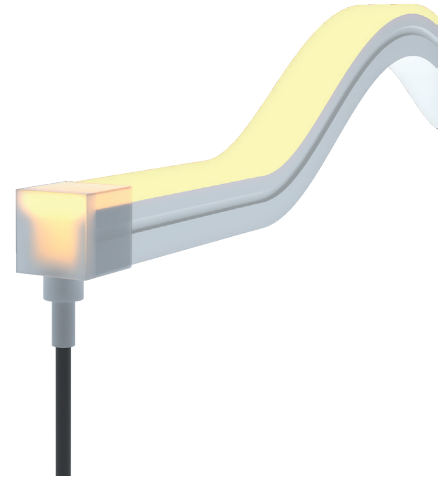

Specifications

Wattage	10W/m
Voltage	DC24V
Dimensions	(W) 10mm x (H) 10mm
Cut Length	50mm
CCT	2700K/3000K/3500K/4000K/5000K/ Solid Colours/RGB/RGBW
Beam Angle	270°
IP Rating	IP67
Luminous Flux	720lm/m
CRI	>92+
Accessories	Surface Mounting Clip, Mounting Profile, Front Power End Cap, Side Power End Cap, Bottom Power End Cap, End Cap
Control Gear	Non Dimmable, 1-10V, TRIAC, DALI, RGB Controller, DMX
Warranty	5 years

Product Accessories

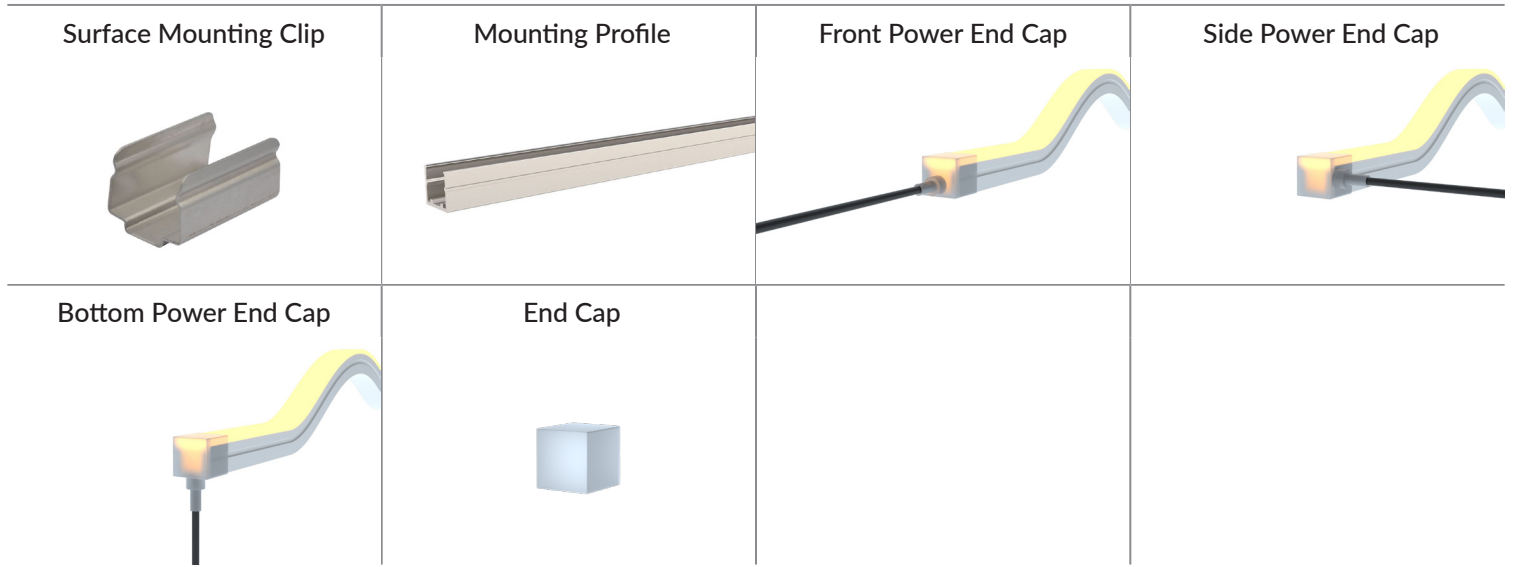

Product Code

Example - NEON.M1010.10.27.160.67.92.NDM

Product Name	Wattage	CCT	Beam Angle	IP Rating	CRI	Control Gear
NEON.M1010	10(W/m)	27 (00K) 30 (00K) 35 (00K) 40 (00K) 50 (00K) SCL (Solid Colour) RGB (RGB) RGBW (RGBW)	160(°)	(IP)67	(>)92(+)	NDM (Non-dimmable) 1-10V (1-10V) TRIAC (TRIAC) DALI (DALI) RGBC (RGB Controller) DMX (DMX)

Product Accessory Code

Example - NEON.M1010.SFMC

Product Name	Accessories
NEON.M1010	SFMC (Surface Mounting Clip) MTPF (Mounting Profile) FPEC (Front Power End Cap) SPEC (Side Power End Cap) BPEC (Bottom Power End Cap) ENDC (End Cap)

Bending Diagram

