




# DOT PLASTER RECESSED 280

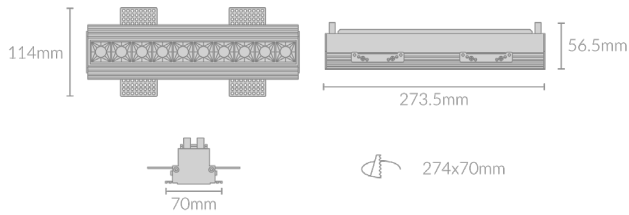

## Specifications

Mounting	Plaster Recessed Mounting	Colour Deviation	<2 SDCM
Wattage	20W	Lifetime	50,000 hours
Voltage	240V	Adjustability	
Dimensions	(L) 273.5mm x (W) 114mm (H) 56.5mm Cut Out - (L) 274mm x (W) 70mm	Control Gear	TRIAC, DALI
Finish	Black/White	Warranty	5 years
Inner Trim Finish	Black		
CCT	2700K/3000K/3500K/4000K		
Beam Angle	10°/15°/30°/45°		
Material	Aluminum		
Driver	Remote		
IP Rating	IP23		
UGR	<19		
Luminous Flux	1350lm		
CRI	>92+		
Accessories	Frosted Filter, Clear Filter, Vertical Filter, Woven Filter		

## Product Accessories


Frosted Filter



Clear Filter



Vertical Filter



Woven Filter



## Product Code

Example - DOT.PR280.20.BLK.BLK.27.10.FRFL.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
DOT.PR280	20(W)	BLK (Black) WHT (White)	BLK (Black)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	10(°) 15(°) 30(°) 45(°)	FRFL (Frosted Filter) CLFL (Clear Filter) VRFL (Vertical Filter) WVFL (Woven Filter)	TRIAC (TRIAC) DALI (DALI)