

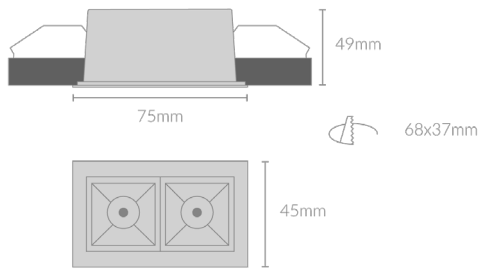


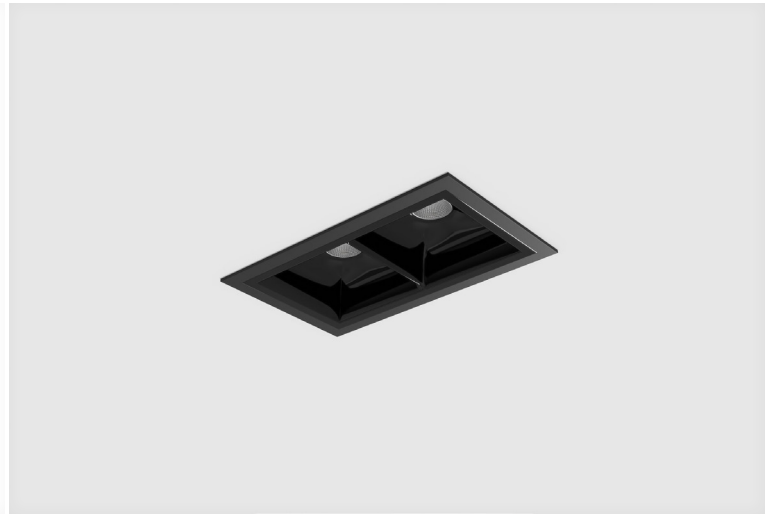

DOT RECESSED 75

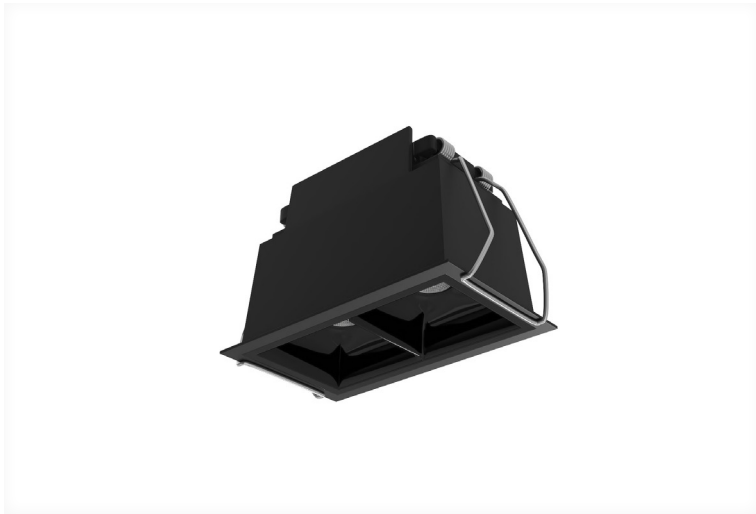

Specifications

| | |
|-------------------|--|
| Mounting | Recessed Mounting |
| Wattage | 4W |
| Voltage | 240V |
| Dimensions | (L) 75mm x (W) 45mm (H) 49mm Cut Out - (L) 68mm x (W) 37mm |
| Finish | Black/White |
| Inner Trim Finish | Black |
| CCT | 2700K/3000K/3500K/4000K |
| Beam Angle | 15°/30°/45° |
| Material | Aluminum |
| Driver | Remote |
| IP Rating | IP23 |
| UGR | <19 |
| Luminous Flux | 310lm |
| CRI | >92+ |
| Accessories | Frosted Filter, Clear Filter, Vertical Filter, Woven Filter |

| | |
|------------------|--------------|
| Colour Deviation | <2 SDCM |
| Lifetime | 50,000 hours |
| Adjustability | |
| Control Gear | TRIAC, DALI |
| Warranty | 5 years |

Product Accessories


Frosted Filter



Clear Filter



Vertical Filter



Woven Filter



Product Code

Example - DOT.R75.4.BLK.BLK.27.15.FRFL.TRIAC

| Product | Wattage | Finish | Inner Trim | CCT | Beam Angle | Accessories | Control Gear |
|---------|---------|----------------------------|-------------|--|-------------------------|---|------------------------------|
| DOT.R75 | 4(W) | BLK (Black) WHT (White) | BLK (Black) | 27 (00K) 30 (00K) 35 (00K) 40 (00K) | 15(°) 30(°) 45(°) | FRFL (Frosted Filter) CLFL (Clear Filter) VRFL (Vertical Filter) WVFL (Woven Filter) | TRIAC (TRIAC) DALI (DALI) |