

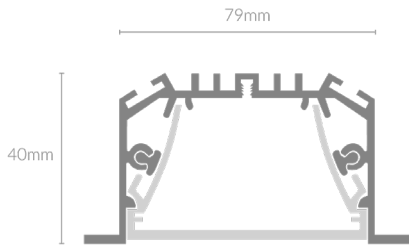
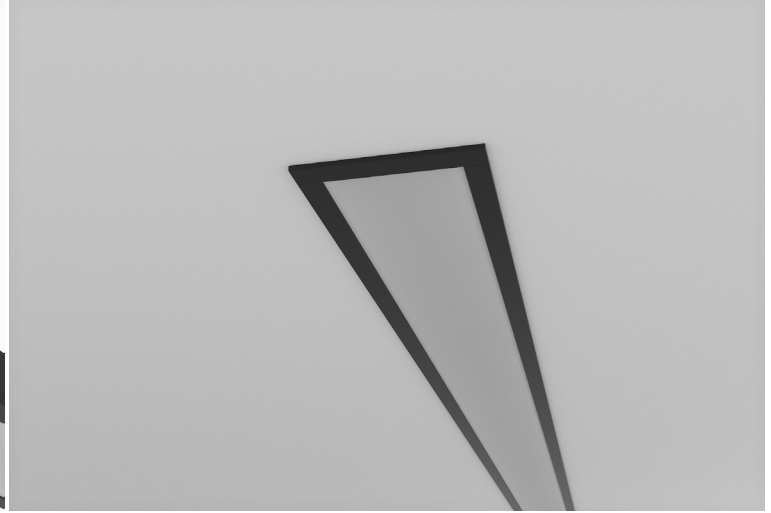



FEYZ LINEAR DIFFUSED 7940

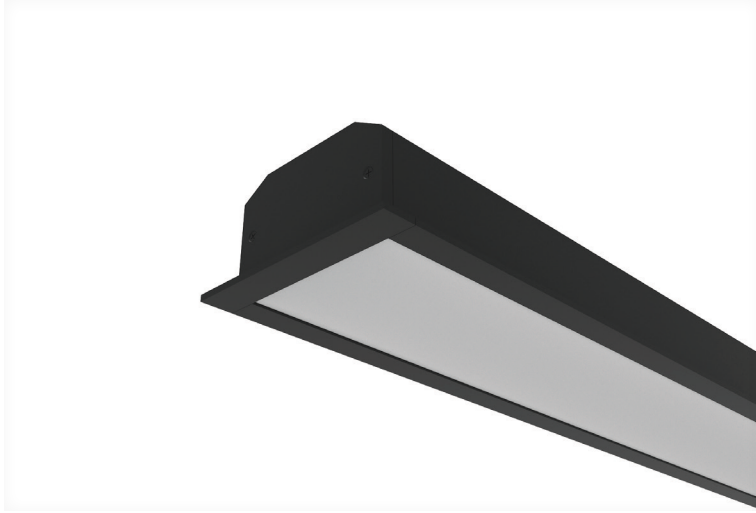

Installation



Rotary Hanging Plate Installation



Spring Mounting


Specifications

Mounting	Recess Mounted
Wattage	15W/22W/30W/38W/45W/52W/60W
Voltage	240V
Dimensions	(W) 40mm x (H) 79mm
Length	576/856/1136/1416/1696/1976/2256mm
Finish	Black/White
CCT	3000K/4000K
Beam Angle	96°
Material	Aluminum
Driver	Inbuilt
Diffuser	Opal Diffuser
IP Rating	IP40
UGR	<22
Luminous Flux	102lm/W
CRI	>83+ / >92+
Colour Deviation	<3 SDCM

Accessories	Recessed Springs, Straight Connector, 90° Connector
Lifetime	50000 hours
Control Gear	Non-Dimmable/1-10V/DALI
Warranty	5 years

Product Diffusers

Opal Diffuser

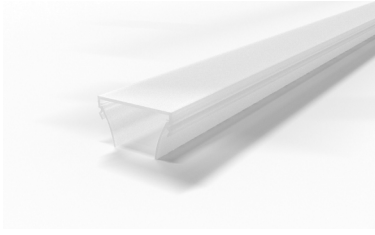

Product Accessories

Recessed Springs



Straight Connector



90° Connector



Product Code

Example - FEYZ.RLD79.RCM.15.BLK.30.83.OPD.96.RCSP.NDM

Product Name	Mounting	Wattage	Finish	CCT	CRI	Diffuser	Beam Angle	Accessories	Control Gear
FEYZ.RLD79	RCM (Recess Mounted)	15(W)	BLK (Black)	30 (00K)	(>)83(+)	OPD (Opal Diffuser)	96 (°)	RCSP (Recessed Springs)	NDM (Non Dimmable)
		22(W)	WHT (White)	40 (00K)	(>)92(+)			STCN (Straight Connector)	1-10V (Dimming)
		30(W)						90CN (90° Connector)	DALI (DALI)
		38(W)							
		45(W)							
		52(W)							
60(W)									