
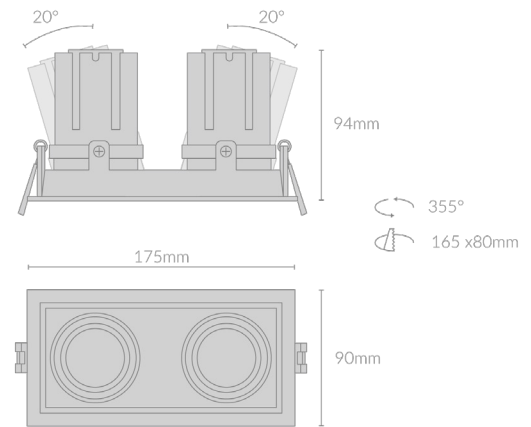


MODO SPOT LIGHT TWO S90

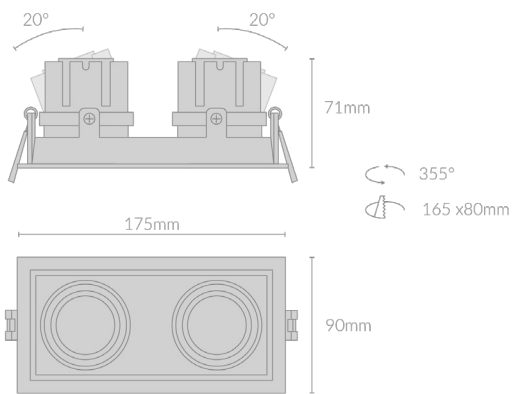

Specifications

| | |
|-------------------|---|
| Mounting | Recessed Mounting |
| Wattage | 2 x 9W, 2 x 15W |
| Dimensions | (L) 175mm x (W) 90mm x (H) 37mm Cut Out - 165 x 80mm |
| Finish | Black/White |
| Inner Trim Finish | |
| CCT | 2700K/3000K/3500K/4000K |
| Beam Angle | 15°/24°/38°/55° |
| Material | Aluminum |
| Driver | Remote |
| IP Rating | IP20 |
| UGR | <19 |
| Luminous Flux | 1530/2550lm |
| CRI | >92+ |
| Accessories | |
| Colour Deviation | <2 SDCM |
| Lifetime | 50,000 hours |

| | |
|---------------|-------------|
| Adjustability | |
| Control Gear | TRIAC, DALI |
| Warranty | 5 years |

Product Code

Example:
Product
MODO.SLOT90

MODO.SLOT90.2X9.BLK.27.15.TRIAC

Wattage
2X9(W)
2X15(W)

Finish
BLK (Black)
WHT (White)

CCT
27 (00K)
30 (00K)
35 (00K)
40 (00K)

Beam Angle
15 (°)
24 (°)
38 (°)
55 (°)

Control Gear
TRIAC (TRIAC)
DALI (DALI)