
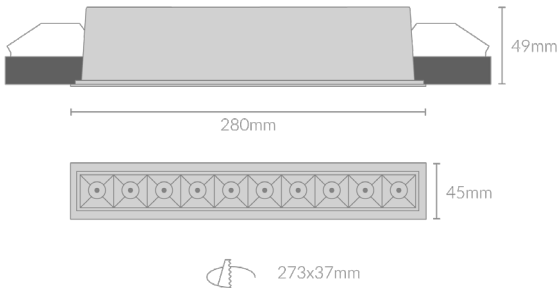


DOT RECESSED 280

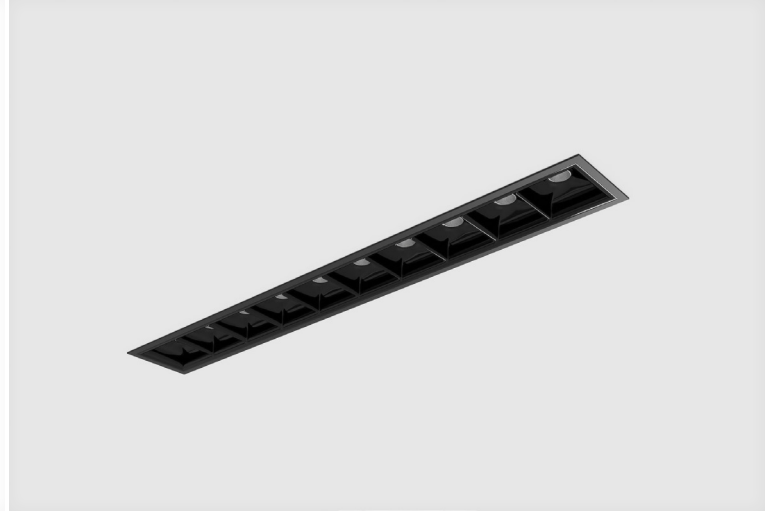

Specifications

Mounting	Recessed Mounting
Wattage	20W
Voltage	240V
Dimensions	(L) 280mm x (W) 45mm (H) 49mm Cut Out - (L) 273mm x (W) 37mm
Finish	Black/White
Inner Trim Finish	Black
CCT	2700K/3000K/3500K/4000K
Beam Angle	10°/15°/30°/45°
Material	Aluminum
Driver	Remote
IP Rating	IP23
UGR	<19
Luminous Flux	1350lm
CRI	>92+
Accessories	Frosted Filter, Clear Filter, Vertical Filter, Woven Filter

Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Adjustability	
Control Gear	TRIAC, DALI
Warranty	5 years

Product Accessories


Frosted Filter



Clear Filter



Vertical Filter



Woven Filter



Product Code

Example - DOT.R280.20.BLK.BLK.27.10.FRFL.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
DOT.R280	20(W)	BLK (Black) WHT (White)	BLK (Black)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	10(°) 15(°) 30(°) 45(°)	FRFL (Frosted Filter) CLFL (Clear Filter) VRFL (Vertical Filter) WVFL (Woven Filter)	TRIAC (TRIAC) DALI (DALI)