




OUTDOOR

RAL ROUND SPOT 18

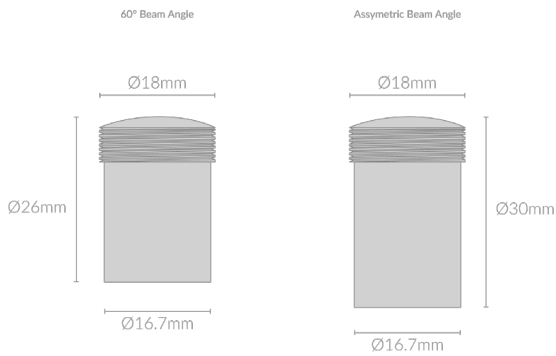

Specifications

Mounting	Recessed Handrail Mounted
Wattage	1.2W
Voltage	DC24V
Dimensions	(D) ØM18mm x (H) 26/30mm
Cut Out Diameter	Ø18mm
Suitable Locations	Ø38-100mm Handrail Wall Thickness >1.5mm
Finish	Stainless Steel
CCT	3000K/4000K
Beam Angle	60°, Assymetric
Material	Stainless Steel
Driver	Remote
IP Rating	IP67
IK Rating	IK09
Luminous Flux	140lm
CRI	>83+
Colour Deviation	<3 SDCM
Lifetime	50,000 hours

Accessories	
Control Gear	Non-dimmable, 1-10V Dimming, DALI
Warranty	5 years

Product Code

Example - RAL.RS18.1-2.SSL.30.60.NDM

Product

Wattage

Finish

CCT

Beam Angle

Control Gear

RAL.RS18

1-2(1.5W)

SSL (Stainless Steel)

30 (00K)

60 (°)

NDM (Non-dimmable)

40 (00K)

ASYM (Assymmetric)

1-10V (1-10V Dimming)

DALI (DALI)