



FEYZ LINEAR DIFFUSED 6588




Specifications

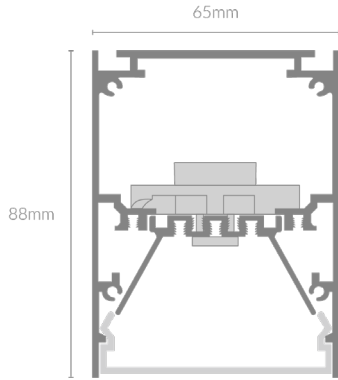

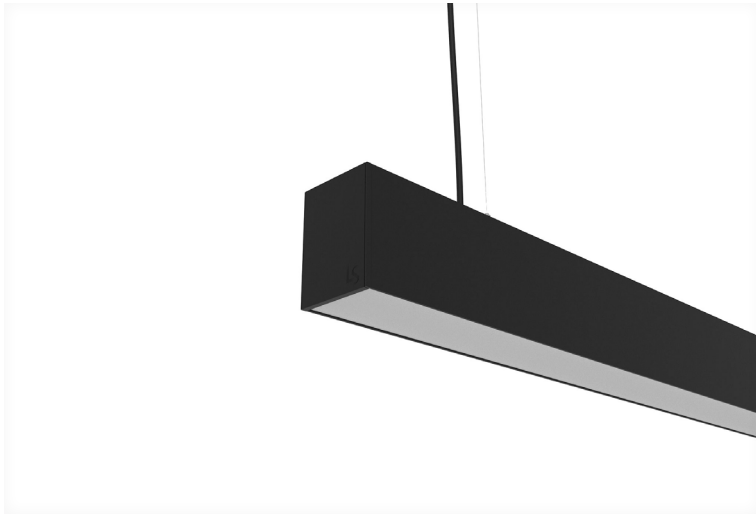


Mounting	Surface Mounted/Suspension Mounted
Wattage	15W/22W/30W/38W/45W/52W/60W
Voltage	240V
Dimensions	(W) 65mm x (H) 88mm
Length	576/856/1136/1416/1696/1976/2256mm
Finish	Black/White
CCT	3000K/4000K
Beam Angle	101.5°
Material	Aluminum
Driver	Inbuilt
Diffuser	Opal Diffuser
IP Rating	IP40
UGR	<22
Luminous Flux	95lm/W
CRI	>83+ / >92+
Colour Deviation	<3 SDCM

Accessories	Canopy Kit, Surface Mount Clip, Suspension Kit, Straight Connector, 90° Connector
Lifetime	50000 hours
Control Gear	Non-Dimmable/1-10V/DALI
Warranty	5 years

Product Diffusers

<p>Opal Diffuser</p> 			
---	--	--	--

Product Accessories

<p>Canopy Kit</p> 	<p>Surface Mount Clip</p> 	<p>Suspension Kit</p> 	<p>Straight Connector</p> 
<p>90° Connector</p> 			

Product Code

Example - FEYZ.LD6588.SFM.15.BLK.30.83.OPD.101-5.CPKT.NDM

Product Name	Mounting	Wattage	Finish	CCT	CRI	Diffuser	Beam Angle	Accessories	Control Gear
FEYZ.LD6588	SFM (Surface Mounted)	15(W)	BLK (Black)	30 (00K)	(>)83(+)	OPD (Opal Diffuser)	105-5 (°)	CPKT (Canopy Kit)	NDM (Non Dimmable)
	SPM (Suspension Mounted)	22(W)	WHT (White)	40 (00K)	(>)92(+)			SFMC (Surface Mount Clip)	1-10V (Dimming)
		30(W)						SPKT (Suspension Kit)	DALI (DALI)
		38(W)						STCN (Straight Connector)	
		45(W)						90CN (90° Connector)	
		52(W)							
60(W)									