


SNOOK ADJUSTABLE SPOTLIGHT 102

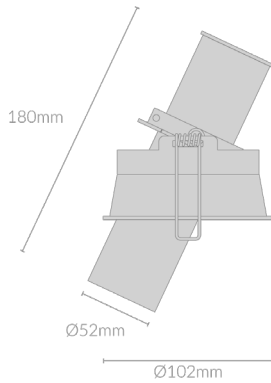

Specifications

Mounting	Recessed Mounting
Wattage	25W
Voltage	240V
Dimensions	(D) Ø52mm x (H) 180mm Cut Out - (D) Ø95mm
Finish	Black/White
Inner Trim Finish	Black/White
CCT	2700K/3000K/3500K/4000K
Beam Angle	15°/24°/36°/60°
Material	Aluminum
Driver	Remote
IP Rating	IP20
UGR	<19
Luminous Flux	1680lm
CRI	>92+
Colour Deviation	<2 SDCM
Lifetime	50,000 hours

Adjustability	
Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens
Control Gear	TRIAC/DALI
Warranty	5 years

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Product Code

Example - SNOOK.AS102.25.BLK.BLK.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
SNOOK.AS102	25(W)	BLK (Black) WHT (White)	BLK (Black) WHT (White)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°) 60(°)	HCMB (Honeycomb Lens) SFLS (Honeycomb Lens) DFLS (Diffuser Lens)	TRIAC (TRIAC) DALI (DALI)