
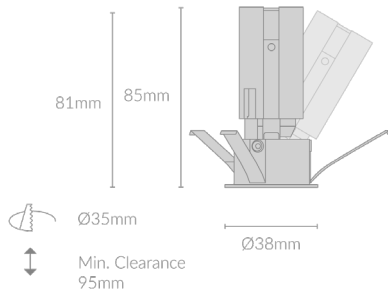


HIRO ANTI-GLARE TILT R38

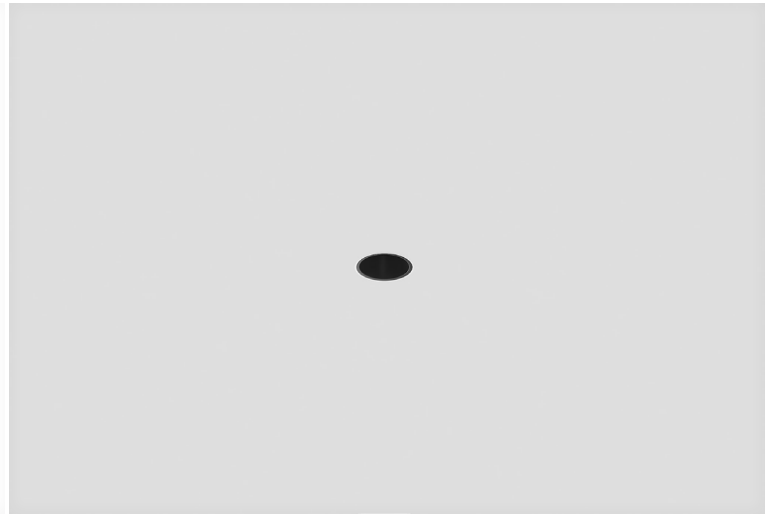

Specifications

Mounting	Plaster Recessed Mounting	Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens
Wattage	6W	Colour Deviation	<2 SDCM
Voltage	240V	Lifetime	50,000 hours
Dimensions	(D) Ø38mm x (H) 81mm Cut Out - Ø35mm	Adjustability	
Finish	White/Black	Control Gear	TRIAC, DALI
Inner Trim Finish	Matte Black/Matte White/Matte Silver/Custom	Warranty	5 years
CCT	2700K/3000K/3500K/4000K		
Beam Angle	15°/24°/36°		
Material	Aluminum		
Driver	Remote		
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm		
IP Rating	IP20		
UGR	<19		
Luminous Flux	375lm		
CRI	>90		
Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens		

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Product Code

Example: HIRO.AGTR038.6.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
HIRO.AGTR038	6(W)	BLK (Black) WHT (White)	ATH (Anthracite) MSV (Matte Silver) MWH (Matte White) CHM (Chrome) MBK (Matte Black) MGD (Matte Gold) CTM (Custom)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°)	HCMB (Honeycomb Lens) SFLS (Soft Lens) DFLS (Diffuser Lens)	TRIAC (TRIAC) DALI (DALI)