
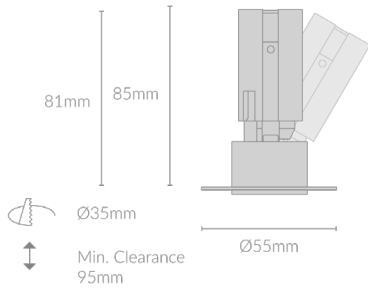


HIRO ANTI-GLARE TRIMLESS TILT R38

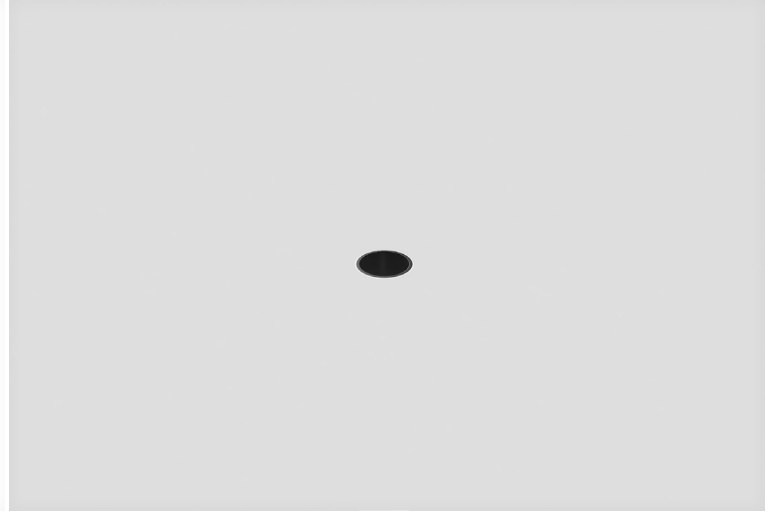

Specifications

Mounting	Plaster Recessed Mounting
Wattage	6W
Voltage	240V
Dimensions	(D) Ø55mm x (H) 81mm Cut Out - Ø35mm
Finish	White/Black
Inner Trim Finish	Matte Black/Matte White/Matte Silver/Custom
CCT	2700K/3000K/3500K/4000K
Beam Angle	15°/24°/36°
Material	Aluminum
Driver	Remote
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm
IP Rating	IP20
UGR	<19
Luminous Flux	375lm
CRI	>90
Accessories	Honeycomb Lense, Soft Lense, Diffuser Lense

Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Adjustability	
Control Gear	TRIAC, DALI
Warranty	5 years

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Product Code

Example: HIRO.AGTTR038.6.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
HIRO.AGTTR038	6(W)	BLK (Black)	ATH (Anthracite)	27 (00K)	15(°)	HCMB (Honeycomb Lens)	TRIAC (TRIAC)
		WHT (White)	MSV (Matte Silver)	30 (00K)	24(°)	SFLS (Soft Lens)	DALI (DALI)
			MWH (Matte White)	35 (00K)	36(°)	DFLS (Diffuser Lens)	
		CHM (Chrome)	40 (00K)	CLLS (Clear Lens)			
		MBK (Matte Black)					
		MGD (Matte Gold)					
		CTM (Custom)					