
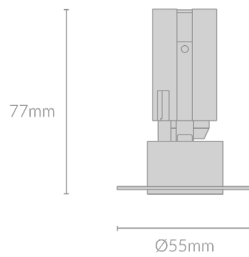


MODO ANTI-GLARE TRIMLESS TILT R38

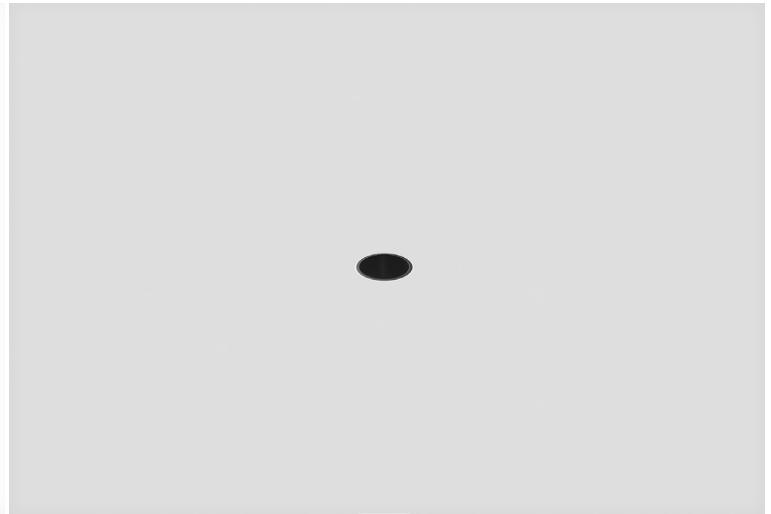

Specifications

Mounting	Plaster Recessed Mounting	Lifetime	50,000 hours
Wattage	6W	Adjustability	
Voltage	240V	Control Gear	TRIAC, DALI
Dimensions	(D) Ø55mm x (H) 77mm Cut Out - Ø55mm	Warranty	5 years
Finish	White/Black		
Inner Trim Finish	Matte Black/Matte White/Matte Silver/Custom		
CCT	2700K/3000K/3500K/4000K		
Beam Angle	15°/24°/36°		
Material	Aluminum		
Driver	Remote		
IP Rating	IP20		
UGR	<19		
Luminous Flux	180lm		
CRI	>90		
Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens		
Colour Deviation	<2 SDCM		

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Product Code

Example: MODO.AGTTR038.6.BLK.MSV.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
MODO.AGTTR062	6(W)	BLK (Black) WHT (White)	MSV (Matte Silver) MWH (Matte White) MBK (Matte Black) CTM (Custom)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°)	HCMB (Honeycomb Lens) SFLS (Soft Lens) DFLS (Diffuser Lens)	TRIAC (TRIAC) DALI (DALI)