


HIRO ANTI-GLARE DEEP RECESSED R56

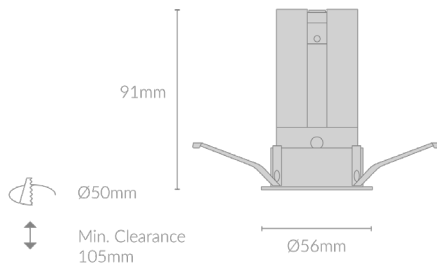

Specifications

Mounting	Plaster Recessed Mounting
Wattage	8W
Voltage	240V
Dimensions	(D) Ø80mm x (H) 91mm Cut Out - Ø50mm
Finish	Black/White
Inner Trim Finish	Anthracite/Matte Silver/Matte White/Chrome/ Matte Black/Matte Gold/Custom
CCT	2700K/3000K/3500K/4000K
Beam Angle	15°/24°/36°/45°
Material	Aluminum
Driver	Remote
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm
IP Rating	IP20
UGR	<19
Luminous Flux	638lm
CRI	>92+

Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens
Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Adjustability	
Control Gear	TRIAC, DALI
Warranty	5 years

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Product Code

Example: HIRO.AGDRR056.8.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
HIRO.AGDRR056	8(W)	BLK (Black)	ATH (Anthracite)	27 (00K)	15(°)	HCMB (Honeycomb Lens)	TRIAC (TRIAC)
		WHT (White)	MSV (Matte Silver)	30 (00K)	24(°)	SFLS (Soft Lens)	DALI (DALI)
			MWH (Matte White)	35 (00K)	36(°)	DFLS (Diffuser Lens)	
			CHM (Chrome)	40 (00K)	45(°)		
			MBK (Matte Black)				
			MGD (Matte Gold)				
			CTM (Custom)				