
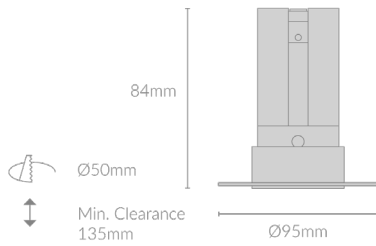


# HIRO ANTI-GLARE DEEP RECESSED TRIMLESS R56

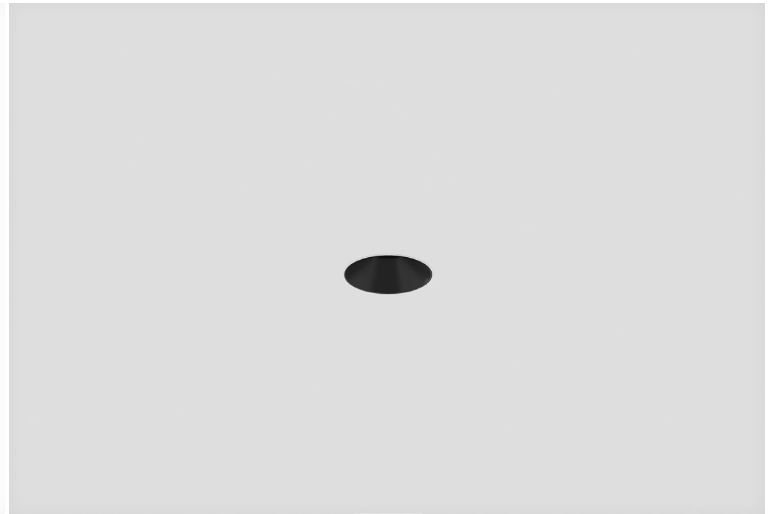

## Specifications

Mounting	Plaster Recessed Mounting	Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens
Wattage	8W		Clear Lens
Voltage	240V	Colour Deviation	<2 SDCM
Dimensions	(D) Ø95mm x (H) 84mm Cut Out - Ø50mm	Lifetime	50,000 hours
Finish	Black/White	Adjustability	
Inner Trim Finish	Anthracite/Matte Silver/Matte White/Chrome/ Matte Black/Matte Gold/Custom	Control Gear	TRIAC, DALI
CCT	2700K/3000K/3500K/4000K	Warranty	5 years
Beam Angle	15°/24°/36°/45°		
Material	Aluminum		
Driver	Remote		
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm		
IP Rating	IP20		
UGR	<19		
Luminous Flux	638lm		
CRI	>92+		

## Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Clear Lens



## Product Code

Example: HIRO.AGDRTR056.8.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
HIRO.AGDRTR056	8(W)	BLK (Black) WHT (White)	ATH (Anthracite) MSV (Matte Silver) MWH (Matte White) CHM (Chrome) MBK (Matte Black) MGD (Matte Gold) CTM (Custom)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°) 45(°)	HCMB (Honeycomb Lens) SFLS (Soft Lens) DFLS (Diffuser Lens) CLLS (Clear Lens)	TRIAC (TRIAC) DALI (DALI)