
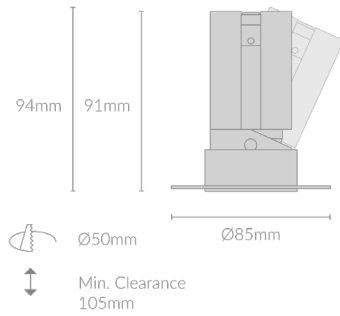


HIRO ANTI-GLARE TRIMLESS TILT R56

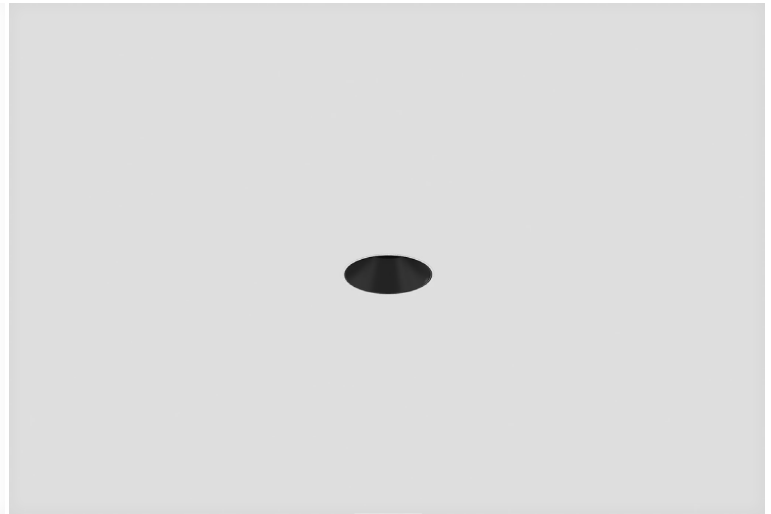

Specifications

Mounting	Recessed Mounting	Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens, Clear Lens
Wattage	8W	Colour Deviation	<2 SDCM
Voltage	240V	Lifetime	50,000 hours
Dimensions	(D) Ø80mm x (H) 91mm Cut Out - Ø50mm	Adjustability	
Finish	Black/White	Control Gear	TRIAC, DALI
Inner Trim Finish	Matte White/Chrome/ Matte Black/Custom	Warranty	5 years
CCT	2700K/3000K/3500K/4000K		
Beam Angle	15°/24°/36°/45°		
Material	Aluminum		
Driver	Remote		
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm		
IP Rating	IP20		
UGR	<19		
Luminous Flux	667lm		
CRI	>92+		

Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



Clear Lens



Product Code

Example: HIRO.ASR056.8.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	CCT	Beam Angle	Accessories	Control Gear
HIRO.ASR056	8(W)	BLK (Black) WHT (White)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°) 45(°)	HCMB (Honeycomb Lens) SFLS (Soft Lens) DFLS (Diffuser Lens) CLLS (Clear Lens)	TRIAC (TRIAC) DALI (DALI)