
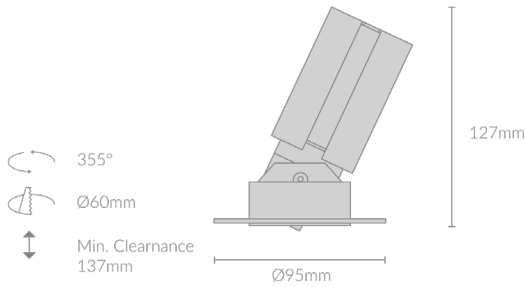


HIRO ADJUSTABLE SPOTLIGHT TRIMLESS R66

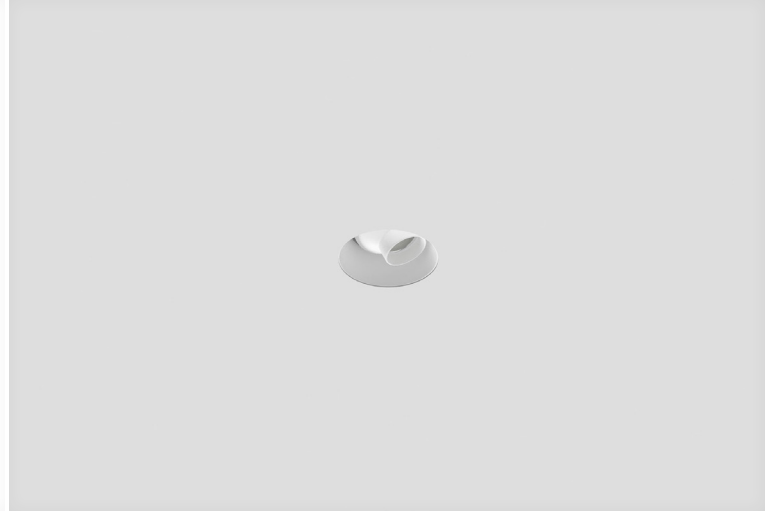

Specifications

Mounting	Plaster Recessed Mounting
Wattage	14W
Voltage	240V
Dimensions	(D) Ø95mm x (H) 127mm Cut Out - Ø60mm
Finish	Black/White
Inner Trim Finish	Matte White/Chrome/ Matte Black/Custom
CCT	2700K/3000K/3500K/4000K
Beam Angle	15°/24°/36°/45°
Material	Aluminum
Driver	Remote
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm
IP Rating	IP20
UGR	<19
Luminous Flux	1082lm
CRI	>92+
Accessories	Honeycomb Lense, Soft Lense, Diffuser Lense

Colour Deviation	<2 SDCM
Lifetime	50,000 hours
Adjustability	
Control Gear	TRIAC, DALI
Warranty	5 years

Product Accessories

Honeycomb Lens	Soft Lens	Diffuser Lens	
			

Product Code

Example: HIRO.ASTR066.14.BLK.27.15.HCMB.TRIAC

Product	Wattage	Finish	CCT	Beam Angle	Accessories	Control Gear
HIRO.ASTR066	14(W)	BLK (Black) WHT (White)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°) 45(°) 55(°)	HCMB (Honeycomb Lens) SFLS (Soft Lens) DFLS (Diffuser Lens)	TRIAC (TRIAC) DALI (DALI)