
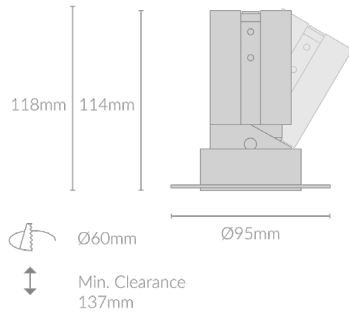


# HIRO ANTI-GLARE TRIMLESS TILT R66

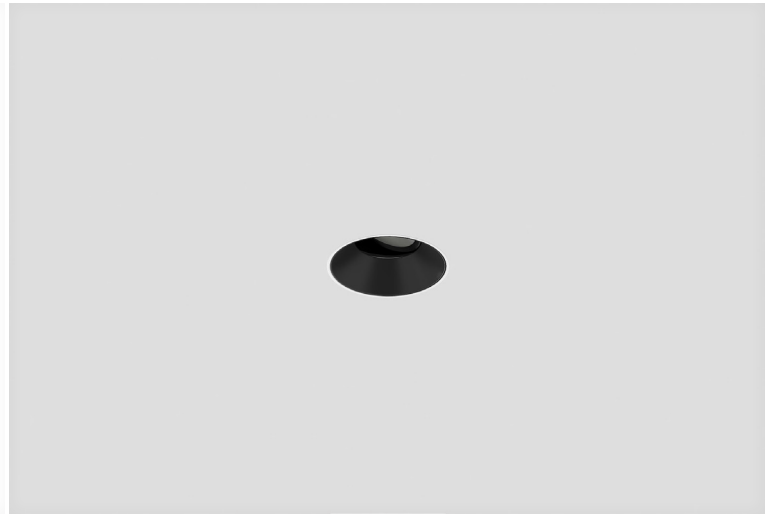

## Specifications

Mounting	Recessed Mounting	Accessories	Honeycomb Lens, Soft Lens, Diffuser Lens
Wattage	12W	Colour Deviation	<2 SDCM
Voltage	240V	Lifetime	50,000 hours
Dimensions	(D) Ø95mm x (H) 114mm Cut Out - Ø60mm	Adjustability	
Finish	Black/White	Control Gear	TRIAC, DALI
Inner Trim Finish	Anthracite/Matte Silver/Matte White/Chrome/ Matte Black/Matte Gold/Custom	Warranty	5 years
CCT	2700K/3000K/3500K/4000K		
Beam Angle	15°/24°/36°/45°/55°		
Material	Aluminum		
Driver	Remote		
Driver Dimensions	(L) 110mm x (W) 42mm x (H) 24mm		
IP Rating	IP20		
UGR	<19		
Luminous Flux	1082lm		
CRI	>92+		

## Product Accessories

Honeycomb Lens



Soft Lens



Diffuser Lens



## Product Code

Example: MODO.AGTTR066.12.BLK.ATH.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
MODO.AGTTR066	12(W)	BLK (Black)	ATH (Anthracite)	27 (00K)	15(°)	HCMB (Honeycomb Lens)	TRIAC (TRIAC)
		WHT (White)	MSV (Matte Silver)	30 (00K)	24(°)	SFLS (Soft Lens)	DALI (DALI)
			MWH (Matte White)	35 (00K)	36(°)	DFLS (Diffuser Lens)	
			CHM (Chrome)	40 (00K)	45(°)		
			MBK (Matte Black)		55(°)		
			MGD (Matte Gold)				
			CTM (Custom)				

## Product Code

Example: HIRO.AGTTR066.6.BLK.MSV.27.15.HCMB.TRIAC

Product	Wattage	Finish	Inner Trim	CCT	Beam Angle	Accessories	Control Gear
HIRO.AGTTR066	12(W)	BLK (Black)	MSV (Matte Silver)	27 (00K)	15(°)	HCMB (Honeycomb Lens)	TRIAC (TRIAC)
		WHT (White)	MWH (Matte White)	30 (00K)	24(°)	SFLS (Soft Lens)	DALI (DALI)
			MBK (Matte Black)	35 (00K)	36(°)	DFLS (Diffuser Lens)	
			CTM (Custom)	40 (00K)			