





# MIRO DOT 40

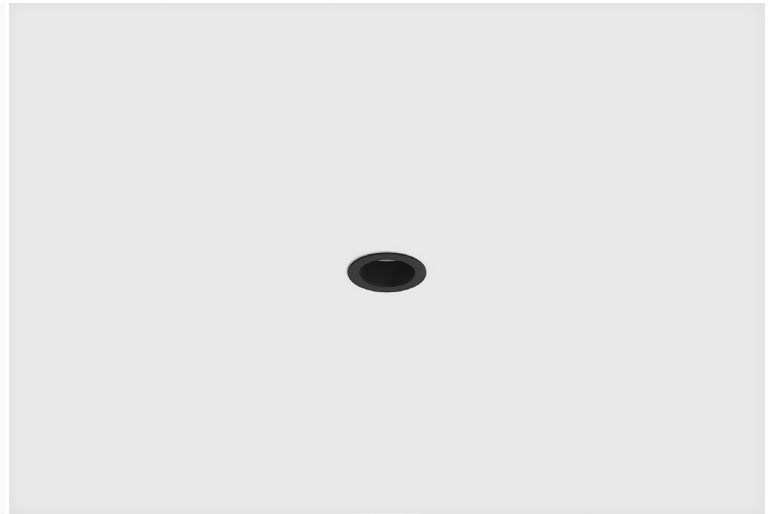

## Specifications

Mounting	Recessed Mounting	Lifetime	50,000 years
Wattage	6W	Adjustability	N/A
Voltage	DC48V	Control Gear	Non Dimmable, 1-10V, DALI
Dimensions	(D) Ø40mm x (H) 75mm Cut Out - Ø35mm	Warranty	5 years
Finish	Black/White		
Inner Trim Finish	N/A		
CCT	2700K/3000K/3500K/4000K		
Beam Angle	15°/24°/36°		
Material	Aluminum		
Driver	Remote		
IP Rating	IP20		
UGR	<19		
Luminous Flux	317lm		
CRI	>92+		
Accessories	N/A		
Colour Deviation	<2 SDCM		

# Product Code

---

Example - MIRO.D40.6.BLK.27.15.NDM

Product	Wattage	Finish	CCT	Beam Angle	Control Gear
MIRO.D40	6(W)	BLK (Black) WHT (White)	27 (00K) 30 (00K) 35 (00K) 40 (00K)	15(°) 24(°) 36(°)	NDM (Non-dimmable) 1-10V (1-10V) DALI (DALI)